



BUILDING-INTEGRATED SOLAR TECHNOLOGY

SOLAR EQUIPMENT & SPACE REQUIREMENT

MITREX SOLAR FACADE -
100kW INDUSTRIAL

1. INTRODUCTION

Photovoltaic systems offer a promising solution to combat global warming while providing sustainable energy for the future. In utility scales, solar farms are prevalent and interconnected with the grid. For enhanced efficiency and reduced loss, it is beneficial to have load and generation sources situated close to each other. Solar projects implemented in or on buildings are particularly advantageous as they harness most of the solar energy for immediate use within the building. This approach not only minimizes losses but also alleviates congestion in transmission and distribution lines.

2. FOR BUILDING OWNERS

A crucial concern for building owners is the electrical equipment required for solar projects. Beyond cost considerations, they worry about the space these equipment installations demand. This document addresses the necessary equipment for various PV project sizes and scenarios.

3. LOGISTICS CONSIDERATIONS

BIPV (Building Integrated Photovoltaics) and regular rooftop solar installations as BAPV (Building applied photovoltaics) differ in terms of installation locations, solar panel types, and mounting equipment. However, both BIPV and BAPV systems share similar components apart from the solar panels. In rooftop projects, a designated area on the flat or tilted roof is necessary. In contrast, BIPV panels replace specific building elements such as facades, windows, railings, and so on, eliminating the need for additional space.

Additional equipment, such as AC equipment, requires some space on the roof, wall, or inside the building (like electrical or mechanical room). The specific requirements for AC equipment depend on factors such as the system size, number of electricity phases (single phase or three phases), maximum DC voltages allowed in the building, and local distribution company (LDC) regulations. When inverters are placed inside the building, DC cables need to be carefully routed through conduits, necessitating penetration points in the structure. The number and size of conduits vary according to each scenario, as detailed in the accompanying table.

4. REQUIRED AC EQUIPMENT FOR DIFFERENT SCENARIOS

Mitrex Panels, both BIPV and BAPV, are suitable for a 1000V system voltage. However, certain buildings may be restricted to a maximum of 600V DC based on local codes. Electricity services typically operate at 240V single phase or 208V, 480V, and 600V three phases. The table below outlines the required AC equipment for all the aforementioned scenarios, considering different system sizes.

		600V DC MAX SYSTEM			
# OF PHASES	SINGLE PHASE	THREE PHASE			
VOLTAGE	240V	208V	480V	600V	
5kW	Inverter	Solaredge SE5000H-US	---	---	---
	Disconnect	240V 30A Disconnect	---	---	---
	Panelboard	---	---	---	---
	Transformer	---	---	---	---
	Conduit	1" Conduit	---	---	---
	SCADA	---	---	---	---
10kW	Inverter	Solaredge SE10000H-US	Solaredge SE10KUS	Fronius Symo 15.0-3	Solaredge SE10KUS
	Disconnect	240V 60A Disconnect	240V 60A Disconnect	600V 30A Disconnect x 2	600V 30A Disconnect x 3
	Panelboard	---	---	---	---
	Transformer	---	---	---	600V/208V 15kVA TX
	Conduit	1 1/4" Conduit	1 1/4" Conduit	1 1/2" Conduit	1 1/4" Conduit
	SCADA	---	---	---	---
20kW	Inverter	Solaredge SE10000H-US x 2	Solaredge SE10KUS x 2	Fronius Symo 20.0-3	Solaredge SE10KUS x 2
	Disconnect	240V 200A Disconnect	240V 100A Disconnect	600V 30A Disconnect x 2	600V 30A Disconnect x 2
	Panelboard	240V 200A Panel	240V 100A Panel	---	600V 100A Panel
	Transformer	---	---	---	600V/208V 30kVA TX
	Conduit	1 1/2" Conduit	2" Conduit	1 1/2" Conduit	2" Conduit
	SCADA	---	---	---	---
50kW	Inverter	---	Solaredge SE17.3KUS x 3	SMA Core1 33.3kW x 2	SMA Core1 33.3kW x 2
	Disconnect	---	240V 200A Disconnect	600V 60A Disconnect x 2	600V 60A Disconnect x 2
	Panelboard	---	240V 200A Panel	600V 100A Panel	600V 100A Panel
	Transformer	---	---	---	600V/480V 75kVA TX
	Conduit	---	2" Conduit	3" or 2 x 2" Conduit	3" or 2 x 2" Conduit
	SCADA	---	Depends on the Hydro	Depends on the Hydro	Depends on the Hydro
100kW	Inverter	---	Solaredge SE17.3KUS x 6	SMA Core1 33.3kW x 3	SMA Core1 33.3kW x 3
	Disconnect	---	240V 400A Disconnect	600V 200A Disconnect x 2	600V 200A Disconnect x 2
	Panelboard	---	240V 400A Panel	600V 200A Panel	600V 200A Panel
	Transformer	---	---	---	600V/480V 150kVA TX
	Conduit	---	3" or 2 x 2" Conduit	4" or 2 x 3" or 3 x 2" Conduit	4" or 2 x 3" or 3 x 2" Conduit
	SCADA	---	Depends on the Hydro	Depends on the Hydro	Depends on the Hydro
500kW	Inverter	---	---	SMA Core1 33.3kW x 15	SMA Core1 33.3kW x 15
	Disconnect	---	---	600V 600A Disconnect x 2	600V 600A Disconnect x 2
	Panelboard	---	---	600V 800A Panel	600V 800A Panel
	Transformer	---	---	---	600V/480V 500kVA TX
	Conduit	---	---	5 x 4" Conduit	5 x 4" Conduit
	SCADA	---	---	Depends on the Hydro	Depends on the Hydro

		1000V DC MAX SYSTEM			
# OF PHASES	SINGLE PHASE	THREE PHASE			
VOLTAGE	240V	208V	480V	600V	
5kW	Inverter	Fronius Primo 5.0-1	---	---	---
	Disconnect	240V 30A Disconnect	---	---	---
	Panelboard	---	---	---	---
	Transformer	---	---	---	---
	Conduit	1 1/4" Conduit	---	---	---
	SCADA	---	---	---	---
10kW	Inverter	Fronius Primo 10.0-1	Fronius Symo 10.0-3 (208V)	Fronius Symo 10.0-3	Fronius Symo 10.0-3
	Disconnect	240V 60A Disconnect	240V 60A Disconnect	600V 30A Disconnect x 2	600V 30A Disconnect x 3
	Panelboard	---	---	---	---
	Transformer	---	---	---	600V/480V 15kVA TX
	Conduit	1 1/2" Conduit	1 1/2" Conduit	1 1/2" Conduit	1 1/2" Conduit
	SCADA	---	---	---	---
20kW	Inverter	Fronius Primo 10.0-1 x 2	Fronius Symo 10.0-3 (208V) x 2	Fronius Symo 20.0-3	Fronius Symo 20.0-3
	Disconnect	240V 200A Disconnect	240V 100A Disconnect	600V 30A Disconnect x 2	600V 30A Disconnect x 3
	Panelboard	240V 200A Panel	240V 100A Panel	---	---
	Transformer	---	---	---	600V/480V 30kVA TX
	Conduit	2" Conduit	2" Conduit	1 1/2" Conduit	1 1/2" Conduit
	SCADA	---	---	---	---
50kW	Inverter	---	Fronius Symo 15.0-3 (208V) x 3	SMA Corel 50kW	SMA Corel 50kW
	Disconnect	---	240V 200A Disconnect	600V 60A Disconnect x 2	600V 60A Disconnect x 3
	Panelboard	---	240V 200A Panel	---	---
	Transformer	---	---	---	600V/480V 75kVA TX
	Conduit	---	3" or 2 x 2" Conduit	1 1/2" Conduit	1 1/2" Conduit
	SCADA	---	Depends on the Hydro	Depends on the Hydro	Depends on the Hydro
100kW	Inverter	---	Fronius Symo 15.0-3 (208V) x 7	Solaredge SE100KUS	Solaredge SE100KUS
	Disconnect	---	240V 400A Disconnect	600V 200A Disconnect x 2	600V 200A Disconnect x 3
	Panelboard	---	240V 400A Panel	---	---
	Transformer	---	---	---	600V/480V 150kVA TX
	Conduit	---	4" or 2 x 3" or 4 x 2" Conduit	2 1/2" or 2 x 1 1/2" PVC Conduit	2 1/2" or 2 x 1 1/2" PVC Conduit
	SCADA	---	Depends on the Hydro	Depends on the Hydro	Depends on the Hydro
500kW	Inverter	---	---	Solaredge SE100KUS x 5	Solaredge SE100KUS x 5
	Disconnect	---	---	600V 600A Disconnect x 2	600V 600A Disconnect x 2
	Panelboard	---	---	600V 800A Panel	600V 800A Panel
	Transformer	---	---	600V/480V 500kVA TX	600V/480V 500kVA TX
	Conduit	---	---	2 x 4" or 5 x 2 1/2" Conduit	2 x 4" or 5 x 2 1/2" Conduit
	SCADA	---	---	Depends on the Hydro	Depends on the Hydro

CASE STUDY

100KW SYSTEM ON MIDRISE INDUSTRIAL BUILDING

BUILDING TYPE:

Industrial building with 480 panels of 300W (total 144 kW DC)

SYSTEM SIZE:

100kW Solaredge inverter SE100KUS

SYSTEM LAYOUT:


12 strings of 40 panels with one building penetration hole (Conduit size 2 1/2")

PROJECT SOLAR EQUIPMENT:


One disconnect switch 200A 600V, One 150kVA transformer 480V/600V, two more disconnect (One could be replaced with breaker inside the main building switchboard if available)

100kW SYSTEM WIRING LAYOUT: HOME RUN TO BUILDING BASEMENT


EAST ELEVATION LAYOUT

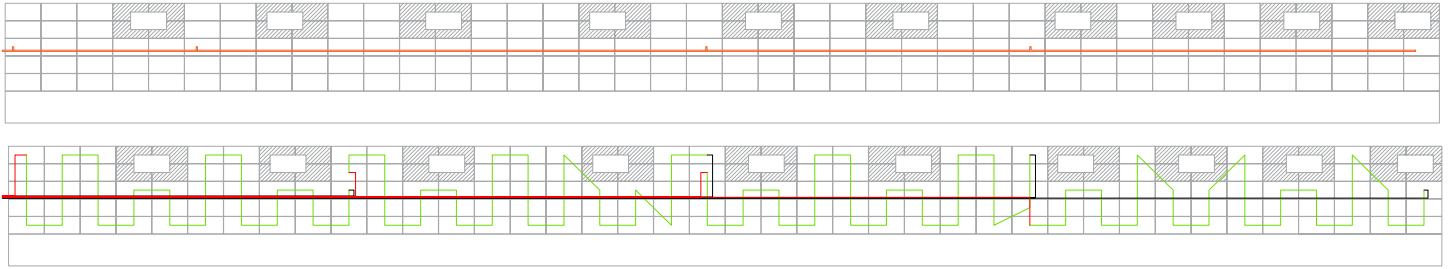


WEST ELEVATION LAYOUT

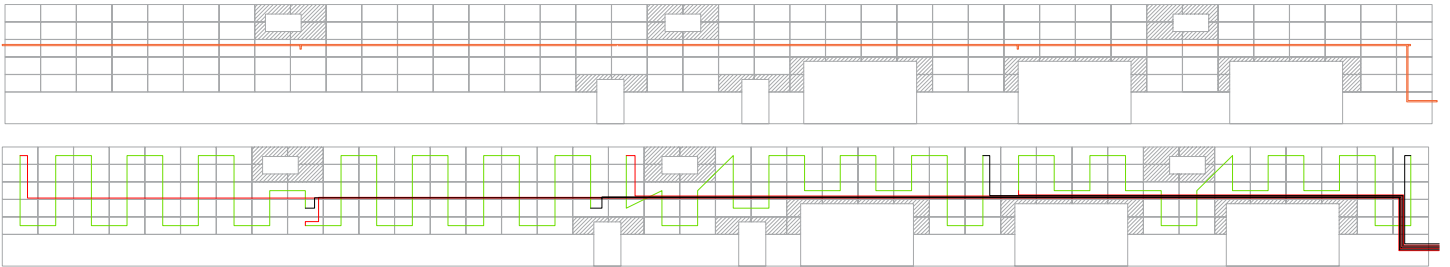

NORTH ELEVATION LAYOUT

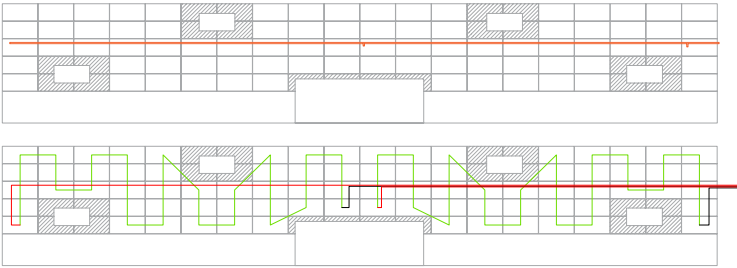


SOUTH ELEVATION LAYOUT

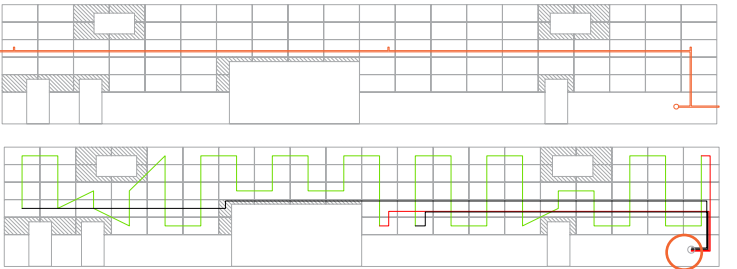

LINE COLOUR REFERENCE


- Building & solar panels layout
- Conduit layout
- Electrical strings
- Home run wiring

BUILDING PENETRATION FOR CONDUIT TO INVERTER




REQUIRED SPACE FOR SOLAR EQUIPMENT: PLACED IN THE BASEMENT

TOP VIEW

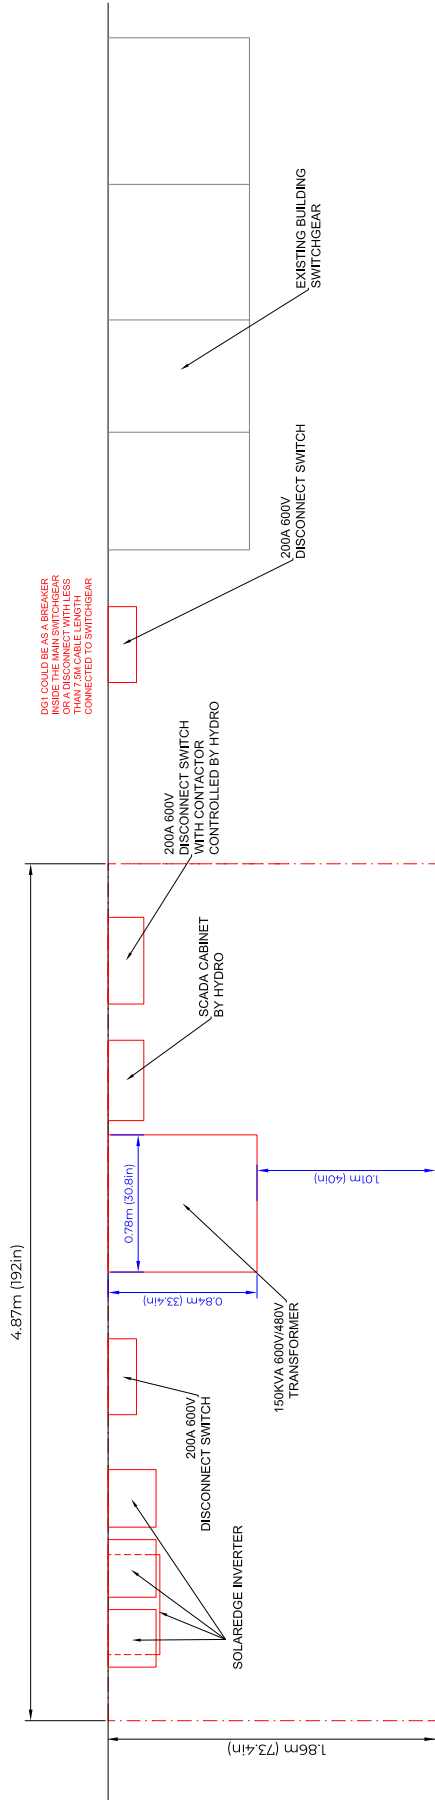


FRONT VIEW

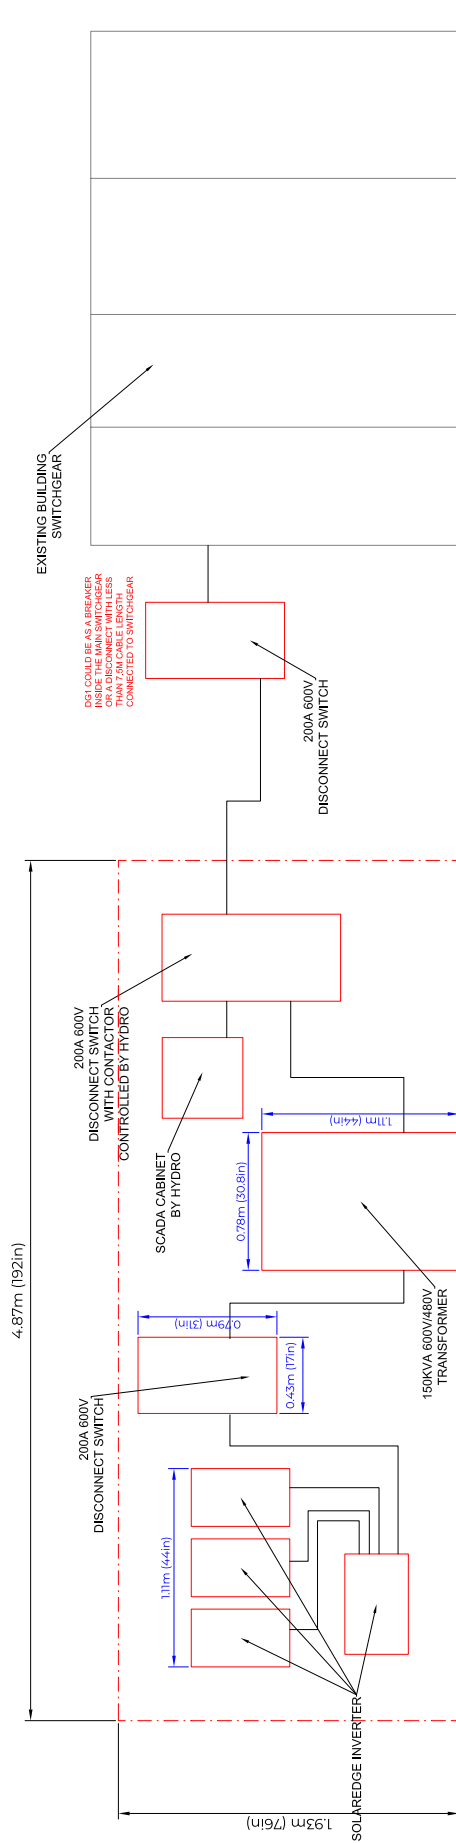


Note: Working area is 1m (39.37in) in front of solar equipments as per electrical code.

100kW SYSTEM WIRING LAYOUT: HOME RUN TO BUILDING ROOFTOP


EAST ELEVATION

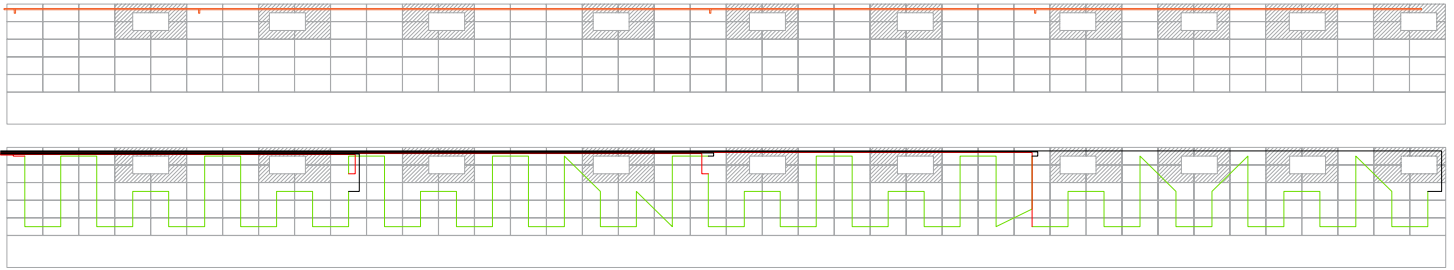


WEST ELEVATION

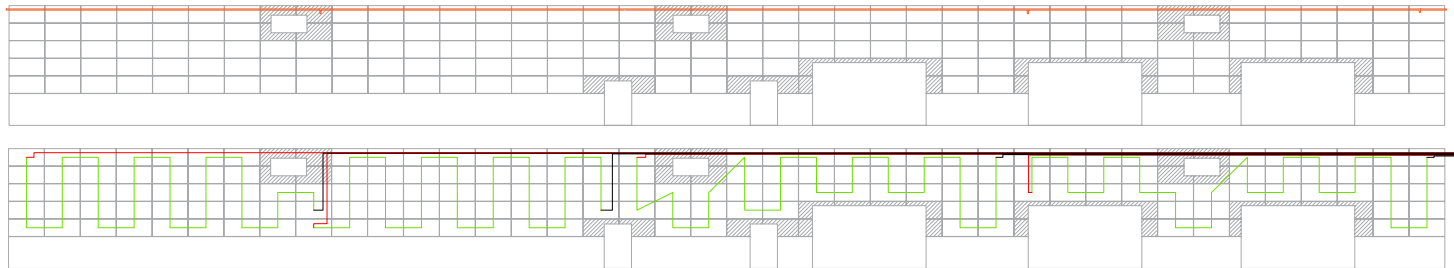


NORTH ELEVATION

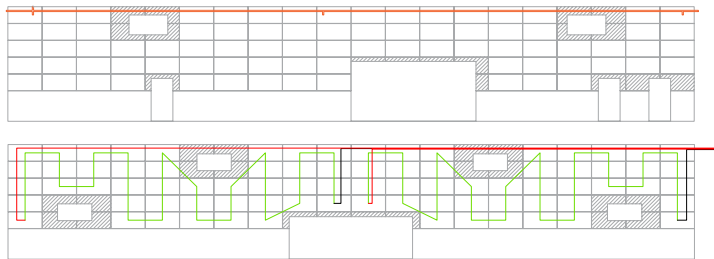

SOUTH ELEVATION

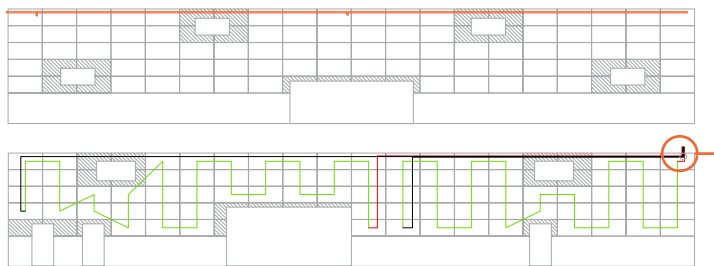

BUILDING PENETRATION FOR CONDUIT TO INVERTER




LINE COLOUR REFERENCE

- Building & solar panels layout
- Conduit layout
- Electrical strings
- Home run wiring


REQUIRED SPACE FOR SOLAR EQUIPMENT: PLACED ON ROOFTOP

TOP VIEW

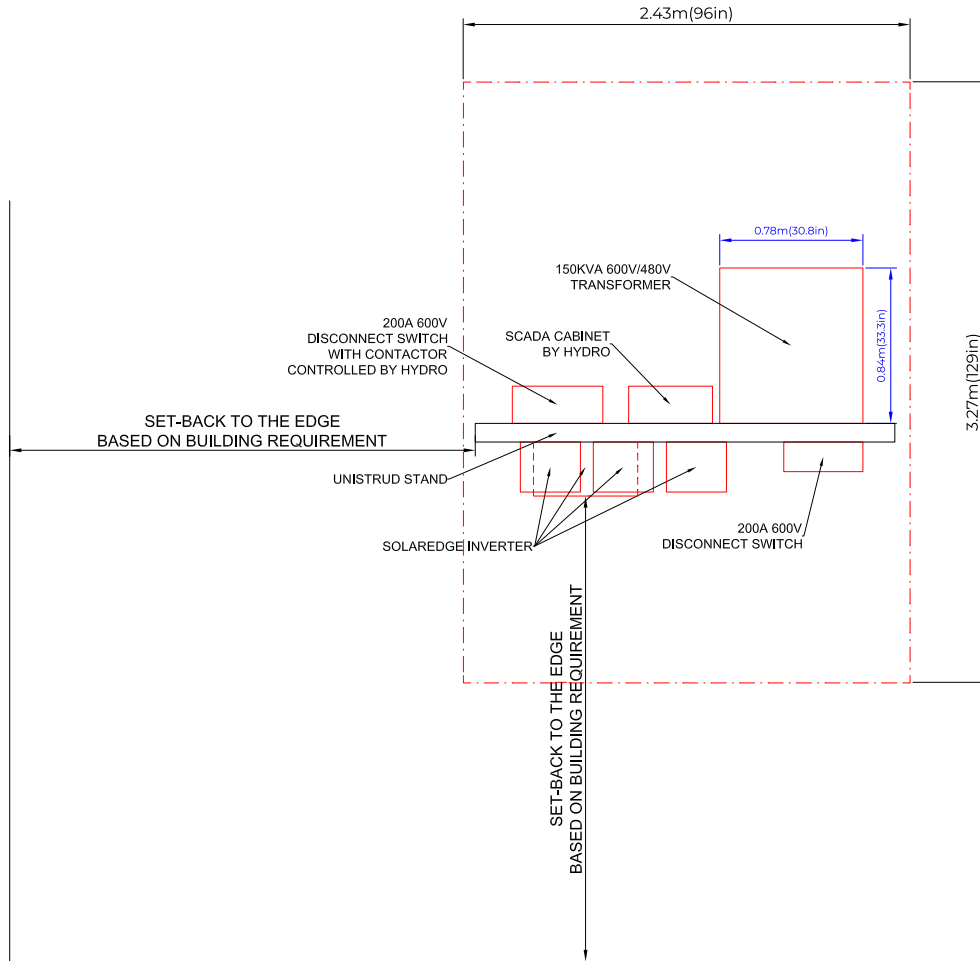

Note: Working area is 1m (39.37in) in front of solar equipments as per electrical code.

FRONT VIEW

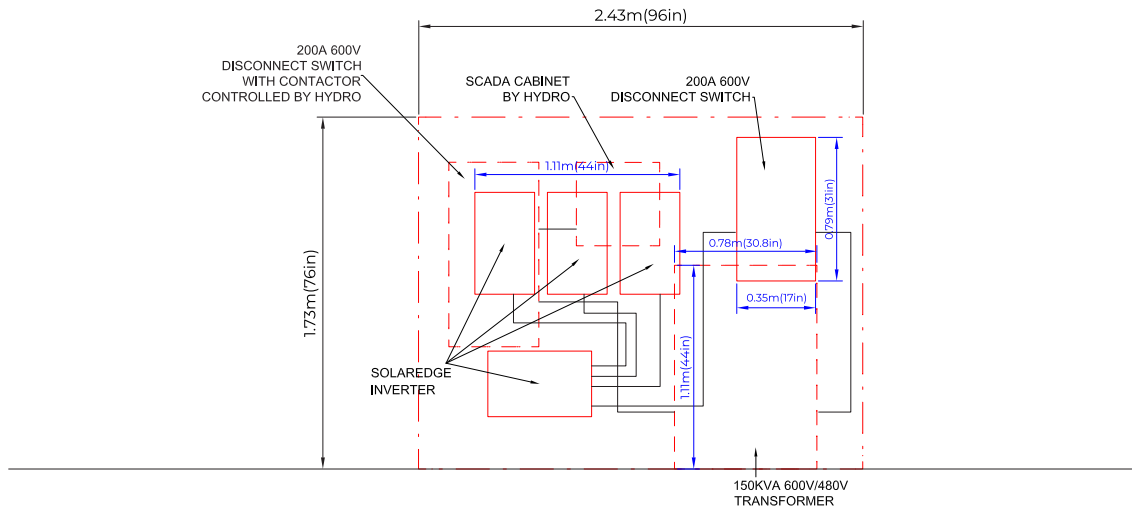

Three Phase Inverter with Synergy Technology

For the 277/480V Grid for North America

SE80KUS / SE100KUS / SE110KUS / SE120KUS



Powered by unique pre-commissioning process for rapid system installation

- Pre-commissioning feature for automated validation of system components and wiring during the site installation process and prior to grid connection
- Easy 2-person installation with lightweight, modular design (each inverter consists of 2 or 3 Synergy units and 1 Synergy Manager)
- Independent operation of each Synergy unit enables higher uptime and easy serviceability
- Built-in thermal sensors detect faulty wiring, ensuring enhanced protection and safety
- Built-in arc fault protection and rapid shutdown
- Built-in PID mitigation for maximized system performance
- Monitored* and field-replaceable surge protection devices, to better withstand surges caused by lightning or other events
- Built-in module-level monitoring with Ethernet or cellular communication for full system visibility

*Applicable only for DC and AC SPDs

/ Three Phase Inverter with Synergy Technology

For the 277/480V Grid for North America

SE80KUS / SE100KUS / SE110KUS / SE120KUS

MODEL NUMBER	SE80KUS	SE100KUS	SE110KUS	SE120KUS	
APPLICABLE TO INVERTERS WITH PART NUMBER	SExxK-USx8lxxxx				UNITS
OUTPUT					
Rated AC Active Output Power	80000	100000	110000	120000	W
Maximum AC Apparent Output Power	80000	100000	120000	120000	VA
AC Output Line Connections	3W + PE, 4W + PE				
Supported Grids	WYE: TN-C, TN-S, TN-C-S, TT, IT; Delta: IT				
AC Output Voltage Minimum-Nominal-Maximum ⁽¹⁾ (L-N)	244 – 277 – 305				Vac
AC Output Voltage Minimum-Nominal-Maximum ⁽¹⁾ (L-L)	422.5 – 480 – 529				Vac
AC Frequency Min-Nom-Max ⁽¹⁾	59.5 – 60 – 60.5				Hz
Maximum Continuous Output Current (per Phase, PF=1)	96.5	120	144.3		Aac
GFDI Threshold	1				A
Utility Monitoring, Islanding Protection, Configurable Power Factor, Country Configurable Thresholds	Yes				
Total Harmonic Distortion	≤ 3				%
Power Factor Range	+/-0.2 to 1				
INPUT					
Maximum DC Power (Module STC) Inverter / Synergy Unit	140000 / 70000	175000 / 58300	210000 / 70000		W
Transformer-less, Ungrounded	Yes				
Maximum Input Voltage DC+ to DC-	1000				Vdc
Operating Voltage Range	850 – 1000				Vdc
Maximum Input Current	2 x 48.25	3 x 40	3 x 48.25		Adc
Reverse-Polarity Protection	Yes				
Ground-Fault Isolation Detection	167kΩ sensitivity per Synergy Unit ⁽²⁾				
CEC Weighted Efficiency	98.5				%
Nighttime Power Consumption	< 8	< 12			W
ADDITIONAL FEATURES					
Supported Communication Interfaces ⁽³⁾	2 x RS485, Ethernet, Wi-Fi (optional), Cellular (optional)				
Smart Energy Management	Export Limitation				
Inverter Commissioning	With the SetApp mobile application using built-in Wi-Fi access point for local connection				
Arc Fault Protection	Built-in, User Configurable (According to UL1699B)				
Photovoltaic Rapid Shutdown System	EC 2014, 2017 and 2020, Built-in				
PID Rectifier	Nighttime, built-in				
RS485 Surge Protection (ports 1+2)	Type II, field replaceable, integrated				
AC, DC Surge Protection	Type II, field replaceable, integrated				
DC Fuses (Single Pole)	25A, integrated				
DC SAFETY SWITCH					
DC Disconnect	Built-in				
STANDARD COMPLIANCE					
Safety	UL1699B, UL1741, UL1741 SA, UL1741 SB, UL1998, CSA C22.2#107.1, Canadian AFCI according to T.I.L. M-07				
Grid Connection Standards	IEEE 1547-2018, Rule 21, Rule 14 (HI)				
Emissions	FCC part 15 class A				

(1) For other regional settings please contact SolarEdge support.

(2) Where permitted by local regulations.

(3) For specifications of the optional communication options, visit the [Communication product page](#) or the [Resource Library](#) to download the relevant product datasheet.

/ Three Phase Inverter with Synergy Technology

For the 277/480V Grid for North America

SE80KUS / SE100KUS / SE110KUS / SE120KUS

MODEL NUMBER	SE80KUS	SE100KUS	SE110KUS	SE120KUS
APPLICABLE TO INVERTERS WITH PART NUMBER	SExxK-USx8lxxxx			UNITS
INSTALLATION SPECIFICATIONS				
Number of Synergy Units per Inverter	2	3		
Ac Max Conduit Size	2 1/2"			in
Max AWG Line / PE	4/0 / 1/0			
DC Max Conduit Size	1 x 3"; 2 x 2"			in
DC Input Inverter/ Synergy Unit	8 / 4 pairs; 6-12 AWG	12 / 4 pairs; 6-12 AWG		
	2 pairs / 1 pair, Max 2 AWG; copper or aluminum	3 pairs / 1 pair, Max 2 AWG; copper or aluminum		
Dimensions (H x W x D)	Synergy Unit: 22 x 12.9 x 10.75 / 558 x 328 x 273 Synergy Manager: 14.17 x 22.4 x 11.6 / 360 x 560 x 295			in / mm
Weight	Synergy Unit: 70.4 / 32 Synergy Manager: 39.6 / 18			lb / kg
Operating Temperature Range	-40 to +140 / -40 to +60 ⁽⁴⁾			°F / °C
Cooling	Fan (user replaceable)			
Noise	< 67			dBA
Protection Rating	NEMA 3R			
Mounting	Brackets provided			

(4) For power de-rating information refer to the [Temperature De-rating - Technical Note \(North America\)](#).

DRY TYPE TRANSFORMER SPECIFICATION

TRANSFORMER SPECIFICATION

RATING	150kVA
COOLING	ANN
TEMPERATURE RISE	115°C
PHASES	3
FREQUENCY	60Hz
K-FACTOR	4

	PRIMARY	SECONDARY
VOLTAGE	600V	480Y/277V
TAPS - FCAN	2 x 2.5%	-
TAPS - FCBN	2 x 2.5%	-
BIL	10kV	10kV

CONDUCTOR	ALUMINUM
WINDINGS	POLYESTER RESIN DIPPED
INSULATION CLASS	220°C
IMPEDANCE (@ 135°C)	3.5% - 5.0%
MIN EFFICIENCY	98.83% @ 35% LOAD, 75°C
AVG. SOUND LEVEL	50dBA
ELECTROSTATIC SHIELD	NONE
EST. WEIGHT	1320 lbs [600kg]

TERMINALS AND CABLE LUGS

	PRIMARY	SECONDARY
LOCATION	FRONT	FRONT
LINE LUGS (/PH)	1 OF 300 MCM-6 AWG	1 OF 300 MCM-6 AWG
NEUTRAL LUGS	N/A	PADS
GROUND LUG	2-14 AWG LUG ON ENCLOSURE BASE	

WIRING / CONNECTIONS



PRIMARY: H1-H2-H3		
VOLTAGE	% TAP	JUMPERS TO:
630	105.0%	1-1-1
615	102.5%	2-2-2
600	100.0%	3-3-3
585	97.5%	4-4-4
570	95.0%	5-5-5

SECONDARY: X0-X1-X2-X3		
VOLTAGE	PHASE	CONNECT LOAD TO
480	3	X1-X2-X3
277	1	X0-X1, X0-X2, AND/OR X0-X3

FEATURES

- NEOPRENE ANTI-VIBRATION PADS INSTALLED BETWEEN CORE & COIL AND ENCLOSURE BASE
- LUG FOR EARTH GROUNDING PROVIDED
- SUITABLE FOR NON-SINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED 4
- NEUTRAL SIZED FOR 200% OF LINE CURRENT
- SEISMIC RATED FOR USA ZONE 4 AND CANADA ZONE 6
- CSA CERTIFIED (FILE # LR34493)
- UL LISTED (FILE # E108255)
- ISO 9001 QUALITY MANAGEMENT SYSTEM
- EFFICIENCY MEETS OR EXCEEDS:
 - CANADA: SOR/DORS/2018-201 (NRCAN 2019)
 - CSA: CSA C802.2-18
 - USA: DOE 10 CFR PART 431:2016-01 (DOE 2016)

- 1) Location of nameplate and labels for Canada
 2) Location of nameplate and labels for USA
 *Recommended area for side cable entry (5"x33") on either side

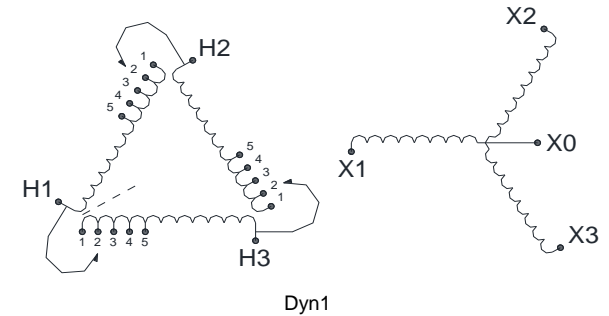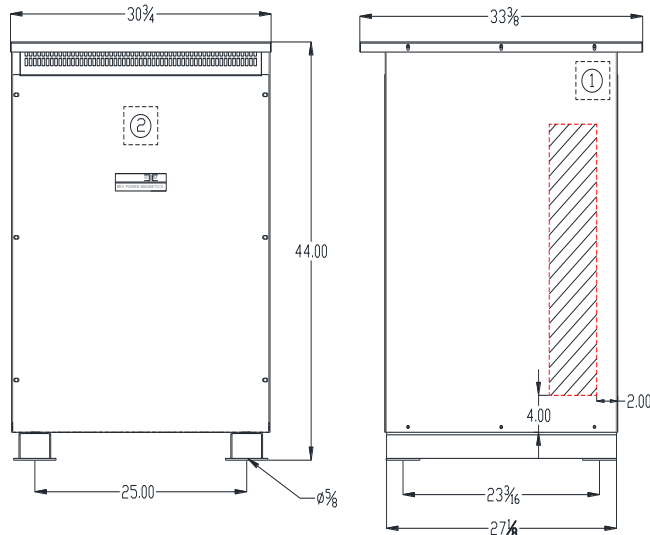

ENCLOSURE

ENCLOSURE PART #	E3R-8
ENCLOSURE RATING	TYPE 3R (INDOOR)*
CONSTRUCTION	VENTILATED
MATERIAL	STEEL
FINISH	POLYESTER POWDER COAT
COLOR	ANSI/ASA 61 (GREY)
MOUNTING	FLOOR

*SPRINKLERPROOF WHEN THE ANGLE BETWEEN SPRINKLER HEADS AND OPENING IN THE ENCLOSURE DOES NOT EXCEED 45 DEGREE FROM THE VERTICAL.

*FOR PROPER VENTILATION FOR FLOOR INSTALLATION KEEP AT LEAST 6 INCHES FROM ADJACENT WALLS

REV	REMARKS	BY	DATE	PRELIMINARY DRAWING	PRODUCT	K-FACTOR RATED ISOLATION TRANSFORMER
				THIS DRAWING MAY NOT TRULY REFLECT OUR FINAL DESIGN. ANY ORDER(S) MUST BE ACCOMPANIED BY OR REFER TO THIS DRAWING. REX POWER MAGNETICS RESERVES THE RIGHT TO CHANGE OR REVISE THESE SPECIFICATIONS WITHOUT NOTICE	MODEL / CAT No.	BA150J-P/K4/T115/Z3
					CUSTOMER	-
					PO #	-
					SWO #	- QTY -
					Prepared By	C.G. Date 9/21/2020
					Approved By	Date -



Heavy Duty Safety Switches

Selection



System	Ampere Rating	Indoor — Type 1		Outdoor — Type 3R		Horsepower Rating [Ⓞ]								250 Volt DC	600 Volt DC
		Catalog Number	Ship Wt. (lbs.) Std. Pkg	Catalog Number	Ship Wt. (lbs.) Std. Pkg	480V AC		600V AC		250 Volt DC	600 Volt DC				
						1-Phase, 2-Wire	3-Phase, 3-Wire	1-Phase, 2-Wire	3-Phase, 3-Wire						

600 Volt Fusible[Ⓢ]

2-Pole, 2-Fuse[Ⓢ]

Ampere Rating	Catalog Number	Ship Wt. (lbs.) Std. Pkg	Catalog Number	Ship Wt. (lbs.) Std. Pkg	480 Volt AC/600 Volt AC/600 Volt DC									
					1-Phase, 2-Wire	3-Phase, 3-Wire	1-Phase, 2-Wire	3-Phase, 3-Wire	250 Volt DC	600 Volt DC				
30	HF261	15	HF261R	15	3	7½	—	—	3	10	—	—	5	15
60	HF262	20	HF262R	20	5	20	—	—	10	25	—	—	10	30
100	HF263	26	HF263R	27	10	30	—	—	15	40	—	—	20	50

3-Pole, 3-Fuse

Ampere Rating	Catalog Number	Ship Wt. (lbs.) Std. Pkg	Catalog Number	Ship Wt. (lbs.) Std. Pkg	480 Volt AC/600 Volt AC/250 Volt DC [Ⓢ]									
					1-Phase, 2-Wire	3-Phase, 3-Wire	1-Phase, 2-Wire	3-Phase, 3-Wire	250 Volt DC	600 Volt DC				
30	HF361	14	HF361R	15	3	7½	5	15	3	10	7½	20	5	—
30	HF361L [Ⓢ]	19	HF361RL [Ⓢ]	20	3	7½	5	15	3	10	7½	20	5	—
60	HF362	19	HF362R	20	5	20	15	30	10	25	15	50	10	30 [Ⓢ]
60	—	—	HF362RL [Ⓢ]	25	5	20	15	30	10	25	15	50	10	30 [Ⓢ]
100	HF363	24	HF363R	25	5	20	25	60	15	40	30	75	20	50 [Ⓢ]
200	HF364	48	HF364R	49	25	50	50	125	30	50	60	150	40	50
400	HF365A [Ⓢ]	93	HF365RA [Ⓢ]	157	—	—	100	250	—	—	125	350	50	—
600	HF366A [Ⓢ]	98	HF366RA [Ⓢ]	161	—	—	150	400	—	—	200	500	50	—
800	HF367	365	HF367R	365	—	—	200	500	—	—	250	500	50	—
1200	HF368	383	HF368R	385	—	—	200	500	—	—	250	500	50	—

3-Pole, 3-Fuse and Solid Neutral

Ampere Rating	Catalog Number	Ship Wt. (lbs.) Std. Pkg	Catalog Number	Ship Wt. (lbs.) Std. Pkg	480 Volt AC/600 Volt AC/250 Volt DC [Ⓢ]									
					1-Phase, 2-Wire	3-Phase, 3-Wire	1-Phase, 2-Wire	3-Phase, 3-Wire	250 Volt DC	600 Volt DC				
30	HF361N	14	HF361NR	15	3	7½	5	15	3	10	7½	20	5	—
60	HF362N	19	HF362NR	20	5	20	15	30	10	25	15	50	10	30 [Ⓢ]
100	HF363N	25	HF363NR	26	10	30	25	60	15	40	30	75	20	50 [Ⓢ]
200	HF364N	49	HF364NR	50	25	50	50	125	30	50	60	150	40	50
400	HF365NA	94.6	HF365NRA	94.6	—	—	100	250	—	—	125	350	50	—
600	HF366NA	99.6	HF366NRA	99.6	—	—	150	400	—	—	200	500	50	—
800	HF367N	375	HF367NR	375	—	—	250	500	—	—	250	500	50	—
1200	HF368N	395	HF368NR	388	—	—	250	500	—	—	250	500	50	—

600 Volt Fusible[Ⓢ] (For 2-Pole Applications use outside poles of 3-Pole Switches)

2-Pole, 2-Fuse[Ⓢ]

Ampere Rating	Type 4/4X Stainless [Ⓢ]		Type 12 Industrial [Ⓢ]		480 Volt AC/600 Volt AC/600 Volt DC									
	Catalog Number	Ship Wt. (lbs.) Std. Pkg	Catalog Number	Ship Wt. (lbs.) Std. Pkg	1-Phase, 2-Wire	3-Phase, 3-Wire	1-Phase, 2-Wire	3-Phase, 3-Wire	250 Volt DC	600 Volt DC				
30	HF261S	15	HF261J■	15	3	7½	—	—	3	10	—	—	5	15
60	HF262S	20	HF262J■	20	5	20	—	—	10	25	—	—	10	30
100	HF263S■	27	HF263J■	27	10	30	—	—	15	40	—	—	20	50

3-Pole, 3-Fuse

Ampere Rating	Catalog Number	Ship Wt. (lbs.) Std. Pkg	Catalog Number	Ship Wt. (lbs.) Std. Pkg	480 Volt AC/600 Volt AC/250 Volt DC [Ⓢ]									
					1-Phase, 2-Wire	3-Phase, 3-Wire	1-Phase, 2-Wire	3-Phase, 3-Wire	250 Volt DC	600 Volt DC				
30	HF361S	13	HF361J	14	—	—	5	15	—	—	7½	20	5	—
60	HF362S	20	HF362J	20	—	—	15	30	—	—	15	50	10	30 [Ⓢ]
100	HF363S	25	HF363J	25	—	—	25	60	—	—	30	75	20	50 [Ⓢ]
200	HF364S	49	HF364J	49	—	—	50	125	—	—	60	150	40	50
400	HF365SA [Ⓢ]	93	HF365JA [Ⓢ]	93	—	—	100	250	—	—	125	350	50	—
400	HF365SSA	93	—	—	—	—	100	250	—	—	125	350	50	—
600	HF366SA [Ⓢ]	98	HF366JA [Ⓢ]	98	—	—	150	400	—	—	200	500	50	—
600	HF366SSA	98	—	—	—	—	150	400	—	—	200	500	50	—
800	HF367S	370	HF367J■	365	—	—	200	500	—	—	250	500	50	—
1200	HF368S■	388	HF368J■	388	—	—	250	500	—	—	250	500	50	—

■ Built to order. Allow 3-5 weeks for delivery.

Ⓢ 60-600A 3-Pole switches are also rated 600V DC.

Ⓢ Height reduced switch (45.25 rather than 56 inches in height) for use with 500MCM or smaller conductors.

Ⓢ Use 3-Pole switch for 200A applications.

Ⓢ Dual horsepower ratings: Std.- applies when non-time delay fuses are installed. Max.- applies when time-delay fuses are installed.

Ⓢ Suitable for use as service entrance equipment except on 1200 Amp solidly grounded wye systems per NEC 230.95.

Ⓢ Also rated Type 3S/3R.

Ⓢ Indicates oversized enclosure (30A switch with 60A lugs in a 60A enclosure or 60A switch with 100A lugs in a 100A enclosure).

Ⓢ 600V DC & 600V DC horsepower rating shown requires (2) poles to be connected in series.

Ⓢ 304 grade stainless steel. For switches with enclosures constructed from 316 grade stainless steel, see page 4-18.

General and Heavy Duty Safety Switches

Dimensions

Safety Switch Dimensions (Inches)* & Shipping Weights

Catalog Number	Height			Width		Depth		Knockout Diagram ^①	Shipping Weight (lbs.)
	Box A	With Door B	With Rain Shed C	Box D	With Handle E	Box F	With Handle G		
HF223S also HF263S	21.96	23.16	—	9.65	12.02	5.34	10.46	—	24
HF224J	29.96	31.07	—	14.62	16.95	6.63	12.58	—	48
HF224N	29.9	31.07	—	14.62	16.98	6.36	12.33	S12	47
HF224NR	29.9	—	31.42	14.61	16.99	6.36	12.33	S13	48
HF224S	29.96	31.07	—	14.62	16.95	6.63	12.58	—	48
HF225NRA	45.32	45.81	—	22.4	23.404	6.94	9.93	S19	91.1
HF225NA	45.32	45.81	—	22.4	23.404	6.94	9.93	S18	91.1
HF226NA	45.32	45.81	—	22.4	23.404	6.94	9.93	S18	95.6
HF226NRA	45.32	45.81	—	22.4	23.404	6.94	9.93	S19	95.6
HF227N	66.67	67.16	—	38.4	39.96	9.24	14.68	—	360
HF227NR	66.67	—	67.74	38.4	39.96	9.24	14.68	—	362
HF228N	66.67	67.16	—	38.4	39.96	9.24	14.68	—	362
HF228NR	66.67	—	67.74	38.4	39.96	9.24	14.68	—	364
HF365A	45.32	45.81	—	22.4	23.404	6.94	9.93	S18	93
HF365JA	45.32	45.81	—	22.4	23.404	6.97	10.05	—	93
HF365RA	45.32	45.81	—	22.4	23.404	6.94	9.93	S19	93
HF365SA	45.32	45.81	—	22.4	23.404	7.34	10.347	—	93
HF365SSA	45.32	45.81	—	22.4	23.404	7.34	10.347	—	93
HF366A	45.32	45.81	—	22.4	23.404	6.94	9.93	S18	98
HF366JA	45.32	45.81	—	22.4	23.404	6.97	10.05	—	98
HF366RA	45.32	45.81	—	22.4	23.404	6.94	9.93	S19	98
HF366SA	45.32	45.81	—	22.4	23.404	7.34	10.347	—	98
HF366SSA	45.32	45.81	—	22.4	23.404	7.34	10.347	—	98
HF321J	14.27	17.33	—	6.65	9.02	5.32	10.46	—	14
HF321N	14.26	15.45	—	6.64	9.01	5.05	10.17	S6	14
HF321NR	14.39	—	15.77	6.64	9.01	5.05	10.17	S8	15
HF321S, SS	14.27	17.33	—	6.65	9.02	5.32	10.46	—	14
HF322J	16.27	19.31	—	9.17	11.47	5.33	10.46	—	20
HF322N	16.26	17.46	—	9.15	11.53	5.05	10.17	S16	19
HF322NR	16.26	—	17.77	9.16	11.53	5.05	10.17	S17	20
HF322S, SS	16.27	19.31	—	9.17	11.47	5.33	10.46	—	20
HF323J	21.96	23.16	—	9.65	12.02	5.34	10.46	—	25
HF323N	21.95	23.15	—	9.64	12.01	5.05	10.17	S10	25
HF323NR	21.95	—	23.46	9.64	11.97	5.05	10.17	S11	26
HF323S, SS	21.96	23.16	—	9.65	12.02	5.34	10.46	—	25
HF324J	29.96	31.07	—	14.62	16.95	6.63	12.58	—	49
HF324N	29.9	31.07	—	14.62	16.98	6.36	12.33	S12	49
HF324NR	29.9	—	31.42	14.61	16.99	6.36	12.33	S13	50
HF324S, SS	21.96	31.07	—	14.62	16.95	6.63	12.58	—	49
HF325JA	45.32	45.81	—	22.4	23.404	6.97	10.05	—	93
HF325NA	45.32	45.81	—	22.4	23.404	6.94	9.93	S18	94.6
HF325NRA	45.32	45.81	—	22.4	23.404	6.94	9.93	S19	94.6
HF325SA	45.32	45.81	—	22.4	23.404	7.34	10.347	—	93
HF325SSA	45.32	45.81	—	22.4	23.404	7.34	10.347	—	93
HF326JA	45.32	45.81	—	22.4	23.404	6.97	10.05	—	98
HF326NA	45.32	45.81	—	22.4	23.404	6.94	9.93	S18	99.6
HF326NRA	45.32	45.81	—	22.4	23.404	6.94	9.93	S19	99.6
HF326SA	45.32	45.81	—	22.4	23.404	7.34	10.347	—	98
HF326SSA	45.32	45.81	—	22.4	23.404	7.34	10.347	—	98
HF327J	66.67	67.16	—	38.4	39.96	9.24	14.68	—	367
HF327N	66.67	67.16	—	38.4	39.96	9.24	14.68	—	380
HF327NR	66.67	—	67.74	38.4	40.25	9.24	14.68	—	383
HF327S	66.67	67.16	—	38.4	39.96	9.24	14.68	—	367
HF328N	66.67	67.16	—	38.4	39.96	9.24	14.68	—	382
HF328NR	66.67	—	67.74	38.4	40.25	9.24	14.68	—	385
HF361, PV, PVPG	14.26	15.45	—	6.64	9.01	5.05	10.17	S6	14
HF361J, JW	14.27	17.33	—	6.65	9.02	5.32	10.46	—	14
HF361L	16.26	17.46	—	9.15	11.53	5.05	10.17	S16	19
HF361N	14.26	15.45	—	6.64	9.01	5.05	10.17	S6	14
HF361NR	14.39	—	15.77	6.64	9.01	5.05	10.17	S8	15
HF361R, RPV, RPVPG	14.39	—	15.77	6.64	9.01	5.05	10.17	S8	15
HF361RL, RW	16.26	—	17.77	9.16	11.53	5.05	10.17	S17	20
HF361S, SS, SSW, SW	14.27	17.33	—	6.65	9.02	5.32	10.46	—	15
HF362, PV, PVPG	16.26	17.46	—	9.15	11.53	5.05	10.17	S16	19

*For inches / millimeters conversion, multiply inches by 25.4.

① Knocks not provided on Type 4 / 4X and 12 or in 800 & 1200A switches.