CFV Solar Test Laboratory 5600-A University Blvd SE Albuquerque, NM 87106 www.cfvlabs.com





Golden Module Test Report: Mitrex M260GR01F612 SN: MIT21A04134

Report Number: 21081-PR-E-007

Report Date: 2022-03-30

Test Period: 2022-01-24 to 2022-03-29

Project ID: 21081 (CFV), PO-000476 (Customer PO)

Customer: Hadi Khatibzadehazad / Mitrex

A 41 Racine Road, Toronto, ON, Canada

M9W 2Z4

Report Prepared by:	Report Reviewed by:

Project Summary

CFV Labs conducted performance at STC and temperature coefficient testing on one **M260GR01F612** module produced by **Mitrex**. An incoming inspection report, sample images and EL images were provided separately to the customer. Following outdoor stabilization in open circuit for >80kWh/m², performance at STC and temperature coefficient measurements were performed.

Preconditioning

Prior to the measurements the module received 89.8 kWh/m² of irradiation in open circuit.

Performance at STC

Estimated uncertainties (k=2) are: Isc $\pm 1.6\%$, Voc $\pm 0.75\%$, Imp $\pm 2.1\%$, Vmp $\pm 1.3\%$, Pmp $\pm 2.2\%$

Module ID	Serial Number	Isc (A)	Voc(V)	Imp (A)	Vmp (V)	Pmp (W)	FF (%)
21081-010	MIT21A04134	6.857	48.20	6.516	40.36	262.98	79.57

Temperature Coefficients

Estimated uncertainties (k=2) are: Relative: Isc ±10%, Voc ±5%, Imp N/A, Vmp ±5%, Pmp ±5%

Module ID	α Isc (%/°C)	β Voc (%/°C)	α Imp (%/°C)	β Vmp (%/°C)	δ Pmp (%/°C)
21081-010	+0.0293	-0.2713	-0.0011	-0.3531	-0.3536



Test Flow Assignment

The project test flow is provided in the diagram below:

Incoming Inspection	A-PAN-File	B-Pvsyst-Simulations	C-Golden-Module
All samples	3 Samples / Type	16 Simulations	One Sample
@Initial	@A-Initial	@B-Simulation	@C-Initial
Incoming Inspection	MQT 06.1 Performance at STC	PVsyst Simulation	MQT 06.1 Performance at STC
MQT 01 Visual Inspection	@A-Stabilization		@C-Stabilization
EL Imaging 1.0x Isc	Custom Light Soak (≥80kWh/m2)		Custom Light Soak (≥80kWh/m2)
	@A-Stabilized		@C-Stabilized
	MQT 06.1 Performance at STC		MQT 06.1 Performance at STC
	MQT 04 Temperature Coefficients		MQT 04 Temperature Coefficients
	Performance Matrix		EL Imaging 1.0x Isc
	EL Imaging 1.0x Isc		
	PAN File Generation		

A total of fourteen modules of several types were provided to CFV Labs for testing. The test flow assignment for each of the modules is provided in the table below. The modules were subjected to the tests legs in the order listed. *This report contains only the golden module testing data for module 21081-010.*

Module ID	Test Leg(s)	Notes
21081-001	Incoming Inspection, A-PAN-File	Results in separate report
21081-002	Incoming Inspection, A-PAN-File	Results in separate report
21081-003	Incoming Inspection, A-PAN-File	Results in separate report
21081-004	Incoming Inspection	Spare
21081-005	Incoming Inspection,C-Golden-Module	Results in separate report
21081-006	Incoming Inspection	Spare
21081-007	Incoming Inspection, A-PAN-File	Results in separate report
21081-008	Incoming Inspection, A-PAN-File	Results in separate report
21081-009	Incoming Inspection	Spare
21081-010	Incoming Inspection, A-PAN-File	Results in this report
21081-011	Incoming Inspection	Spare
21081-012	Incoming Inspection, A-PAN-File	Results in separate report
21081-013	Incoming Inspection, A-PAN-File	Results in separate report
21081-014	Incoming Inspection, A-PAN-File	Results in separate report

CFV Labs

Results

MQT 01 Visual Inspection

No major defects were observed during the visual inspection.

Preconditioning

The modules received 89.8 kWh/m² of irradiation in open circuit under natural sunlight.

MQT 06.1 Performance at STC

Estimated Uncertainties (k=2) are: Isc ±1.6%, Voc ±0.75%, Imp ±2.1%, Vmp ±1.3%, Pmp ±2.2%

Module ID	Reference	Isc (A)	Voc(V)	Imp (A)	Vmp (V)	Pmp (W)	FF (%)
21081-010	A-Initial	6.854	48.19	6.547	40.39	264.41	80.05
21081-010	A-Stabilized	6.857	48.20	6.516	40.36	262.98	79.57


Temperature Coefficients

Estimated uncertainties (k=2) are: Relative: Isc ±10%, Voc ±5%, Imp N/A, Vmp ±5%, Pmp ±5%

Module ID	α Isc (%/°C)	β Voc (%/°C)	α Imp (%/°C)	β Vmp (%/°C)	δ Pmp (%/°C)
21081-010	+0.0293	-0.2713	-0.0011	-0.3531	-0.3536

Electroluminescence (EL) Imaging

EL images are provided below and separately to the customer in digital format.

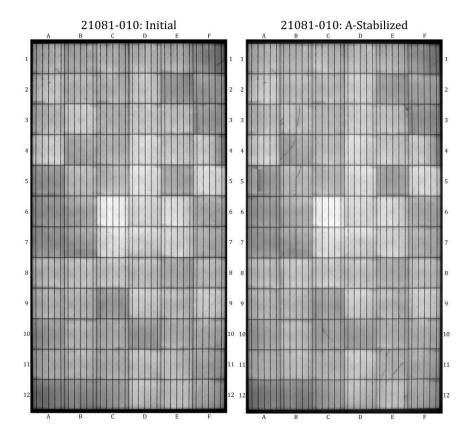

Page 3 of 6

CFV Labs

Sample Information

Sample images and an incoming inspection are provided separately to the customer in digital format.

Sample Labeling:

Module ID	Module ID Manufacturer	Module Type	Serial Number	
21081-010	Mitrex	M260GR01F612	MIT21A04134	

Construction Details:

Module Type	Length [m]	Width [m]	Thickness [mm]
M260GR01F612	2.030	1.067	23.5

Nameplate Values:

No nameplates were attached to the modules. The module type is adopted to be a 260W class module based on communication with the customer and the measured STC power. No other nameplate data is available.

Module Type	Isc [A]	Voc [V]	Imp [A]	Vmp [V]	Pmp [W]	Max Sys Volt [V]	Fuse Rating [A]
M260GR01F612	-	-	-	-	260	-	-

Sample Images:



Page 4 of 6



Procedures

The procedures for the testing in this report are summarized in the following table:

Test Name	Standard / Procedure	CFV Accreditation
Incoming Inspection	CFV	NA
Visual Inspection	IEC 61215-2:2016 MQT 01	ISO 17025
Electroluminescence Imaging	IEC TS 60904-13:2018	ISO 17025
Preconditioning	IEC 61215:2005, Clause 5	ISO 17025
Performance at STC	IEC 61215-2:2016 MQT 06.1	ISO 17025
Temperature Coefficients	IEC 61215-2:2016 MQT 04	ISO 17025

Equipment and Calibration

Equipment and calibration information is available upon request.

CFV Solar Test Laboratory 5600-A University Blvd SE Albuquerque, NM 87106 www.cfvlabs.com

CFV Labs

Disclaimer and Conditions of Report Reproduction

- 1. CFV Solar Test Laboratory, Inc. (dba "CFV Labs" or "CFV") is an independent third-party laboratory and as such does not represent the interest of any other party in any capacity. As part of our ISO 17025 accreditation, impartiality is fundamental to our business.
- 2. This test report represents the commercially reasonably good-faith efforts of CFV Labs at fulfilling the goals of the client's mutually agreed upon test project with CFV Labs. There are no warranties expressed or implied for the test results.
- 3. When possible, CFV Labs uses published standards (by IEC, ANSI, etc.) to which it has ISO 17025 accreditation to perform tests. However, some test projects require testing for which there is no published standard. For these projects, or portions of projects, CFV agrees with the client ahead of time on a test procedure that may be able to accomplish the objectives of the project.
- 4. Whether standards-based testing or custom testing is done, there is no guarantee or warranty expressed or implied that the results will completely answer questions or concerns the client may have about the items tested.
- 5. This report is the property of the client and may be shared in full with other parties at the client's discretion and CFV Labs will not share this report with any third party without the client's permission. However, this report may not be shared or reproduced except in full without CFV Labs' permission. The use of CFV Labs' name or logo attached to any portion of the results, except for in the form of the full report is not permitted without CFV Labs' permission.
- 6. The test results in this report apply only to the specific items tested by CFV Labs and no claim is expressed or implied that they apply to other similar items, whether CFV Labs was involved in the sampling of the items tested or not.
- 7. The test results in this report do not imply either the suitability or unsuitability of any of the items tested for any particular application and no opinion is expressed by CFV Labs on that herein.
- 8. The test results in this report do not imply the responsibility or lack of responsibility of any party, financial or otherwise, as to the condition of the items tested by CFV Labs, or any similar items not tested by CFV Labs, and no opinion is expressed on that herein.

--END OF REPORT--