

**Trick** Push the Boundaries



# Light First

## Social innovation through lighting

### Socially engaged

iGuzzini is an international community at the service of architecture and the development of the culture of lighting, for a better society and life. It is a centre of excellence for the study of lighting in its various forms. It produces lighting systems in collaboration with leading lighting designers, architects, designers, universities and research centres all over the world. **Respect for the environment, biological wellbeing, sustainable economies:** these are the factors we need to work on, on a global scale, for the positive development of society. Lighting is first and foremost for people, our commitment being to promote responsible use of energy by public organisations, by the leaders in architecture, industry and commerce, supporting town mayors, for a real improvement in wellbeing and quality of life.

### Lighting innovation

Social innovation means responding to emerging needs with new ways of cooperating, in a network, through open networks, producing sustainable ideas and identifying new tools. Lighting changes things. It is at the centre of social changes. It is the expression of **new vital energy** running through the city, building architecture, creating wellbeing for people. Lighting reveals the nature of man, it shows worlds and relationships, communities and mechanisms. iGuzzini works to use lighting to improve the relationship between man and the environment, through research, manufacturing, technology and knowledge.

iGuzzini



[www.iguzzini.com/lightfirst](http://www.iguzzini.com/lightfirst)



**Trick**  
Social contest

Trick is not designed to create general light or meet the specific mathematical requirements of illuminating space. It's a fun device for people to play with. That's the idea behind its design.

Dean Skira, Trick designer



# #PlayYourTrick

Show us your application ideas.

Post your idea with a photo, sketch, rendering or video on Twitter or Instagram. Describe your idea in a few words, mention @iGuzzini and insert the #PlayYourTrick hashtag.

Those with the most likes on Instagram or retweets on Twitter by December 31st will win a #PizzaKobra limited edition table lamp.



1




Post your idea with a photo, sketch, rendering or video on Twitter or Instagram...




2

#PlayYourTrick  
@iguzzini

Describe your idea in a few words, mention @iGuzzini and insert the #PlayYourTrick hashtag.

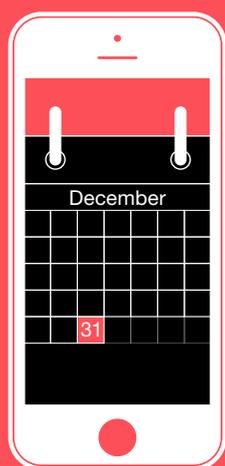

3



Those with the most likes on Instagram or retweets on Twitter by December 31st...



4

PizzaKobra Limited Edition  
( Design Ron Arad )

Follow the competition at  
[iguzzini.com/playyourtrick](http://iguzzini.com/playyourtrick)

# Trick


**Led is more.** Designing with Leds means studying new ways of combining the different technological elements that make up our luminaires. Trick is the result of our consolidated expertise in materials that enables us to produce continuously innovative optic systems.

# Push the Boundaries.

## Apply new opportunities.

Forget traditional rules and enjoy three-dimensional games and endless graphic combinations instead. Trick is the product that goes beyond the rules and regulations of architecture. It is the ideal instrument for architects and light designers who

wish to test new solutions without sacrificing high level performance. Two functions: architectural and artistic. Three effects: light blade, radial and washer. Trick's changing spirit adapts to any kind of use that this unique device is put to.

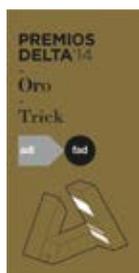

Premios Delta '14



"The hottest product  
at Light + Building 2014"

[iguzzini.com/trick](http://iguzzini.com/trick)  
[pinterest.com/iguzzini/trick](https://www.pinterest.com/iguzzini/trick)

**Light Blade Effect /  
360° Blade Effect**

Surface-mounted  
Ø 90 mm

Pag. 20-29

**180° Blade Effect**

Surface-mounted  
Ø 90 mm / Ø 110 mm

Pag. 24-31

**Washer Effect**

Surface-mounted  
Ø 90 mm / Ø 110 mm

Pag. 36-41





**Washer Effect**

Recessed  
Ø 45 mm





Pag. 36-41







Ceiling installation

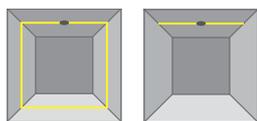

Wall installation

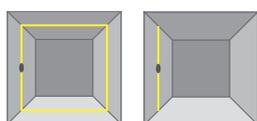



Horizontal surface installation



# Overview



**Radial Effect**  
Surface-mounted  
Ø 160 mm

Pag. 30-35





**Radial Effect**  
Surface-mounted  
Ø 110 mm

Pag. 30-35



**Radial Effect**  
Recessed  
Ø 45 mm

Pag. 30-35



Over the years, natural light has won a central role in architectural design and been recognised as a material in its own right. With Trick this relationship now also enjoys a new, contemporary expression at night.



# Graphic lighting.



Rhythmic melodies of light and shadow.

With Trick you can modulate light effects to turn surfaces into vast canvasses. This is a luminaire with a dual character offering either light blade or surface skimming effects and radial or washer versions. When used to illuminate architecture, the luminaire

animates compositions with light beams that run parallel or cross over to highlight new planes. The radial or washer effect versions decorate vertical or horizontal surfaces with atmospheric and carefully monitored lighting effects.




A **light blade** forms geometric textures or creates interruptions that usher in a new relationship between lighting and architecture.

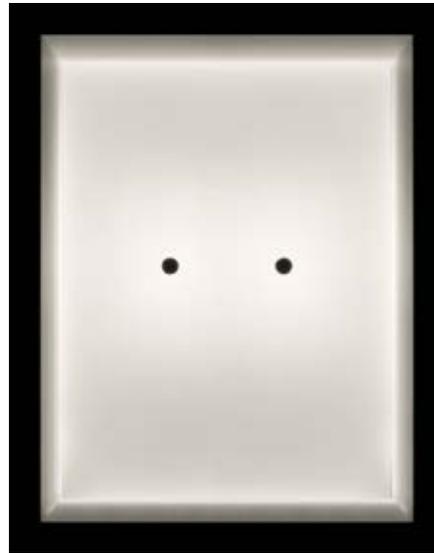

**Radial light** enhances surface materials and emphasizes shapes, contrasts and details.




**Washer effects** highlight architectural or natural elements to create a complex yet harmonious space.



When light is emitted radially it meets elements that cast shadows enabling signs to be read as immaterial elements that appear and move and disappear again according to the presence and dynamic character of the light.



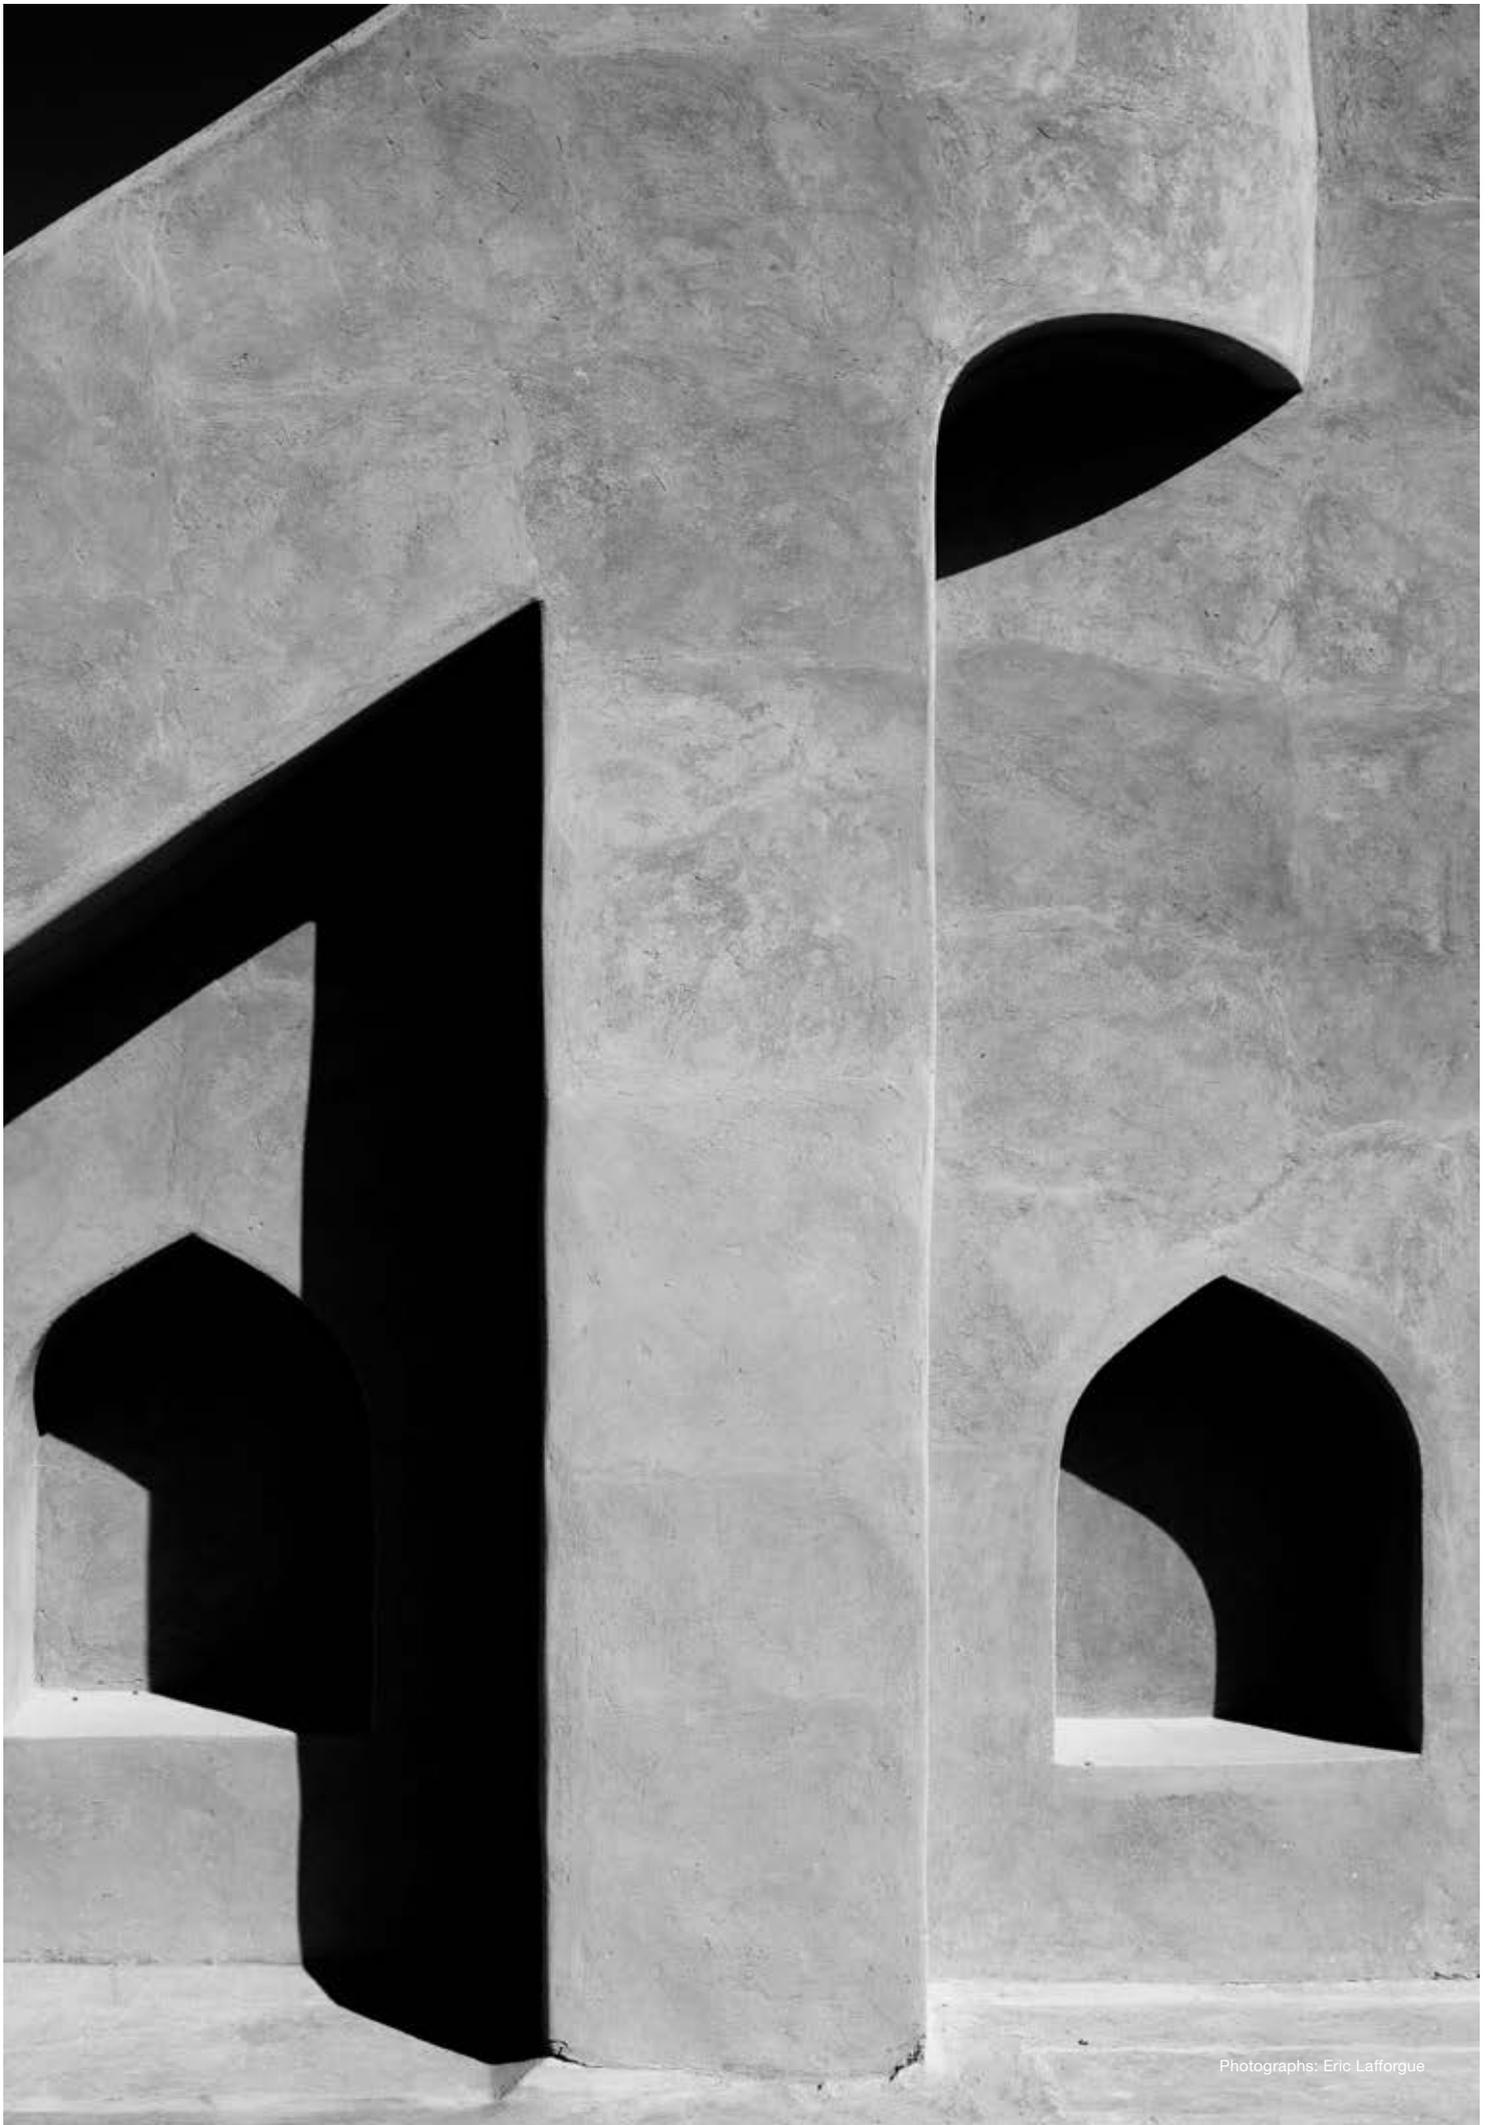



**Formal continuity.** Trick's wide range of sizes and models all follow the same design logic, so when used together they create a sense of formal consistency.

# Express yourself.

A range of points.

Trick is a gem of light with a minimal design and comes in four different sizes: 45, 90, 110 and 160 mm. Its pointed geometric shape looks simple, but every tiny detail is painstakingly designed. This is a device that magically blends

into the background during the day and comes out to illuminate at night. We have focused all our know-how into the tiny body of this device and enhanced all the features of our new led lamps to obtain exciting, non invasive lighting solutions.


160

110

90

45



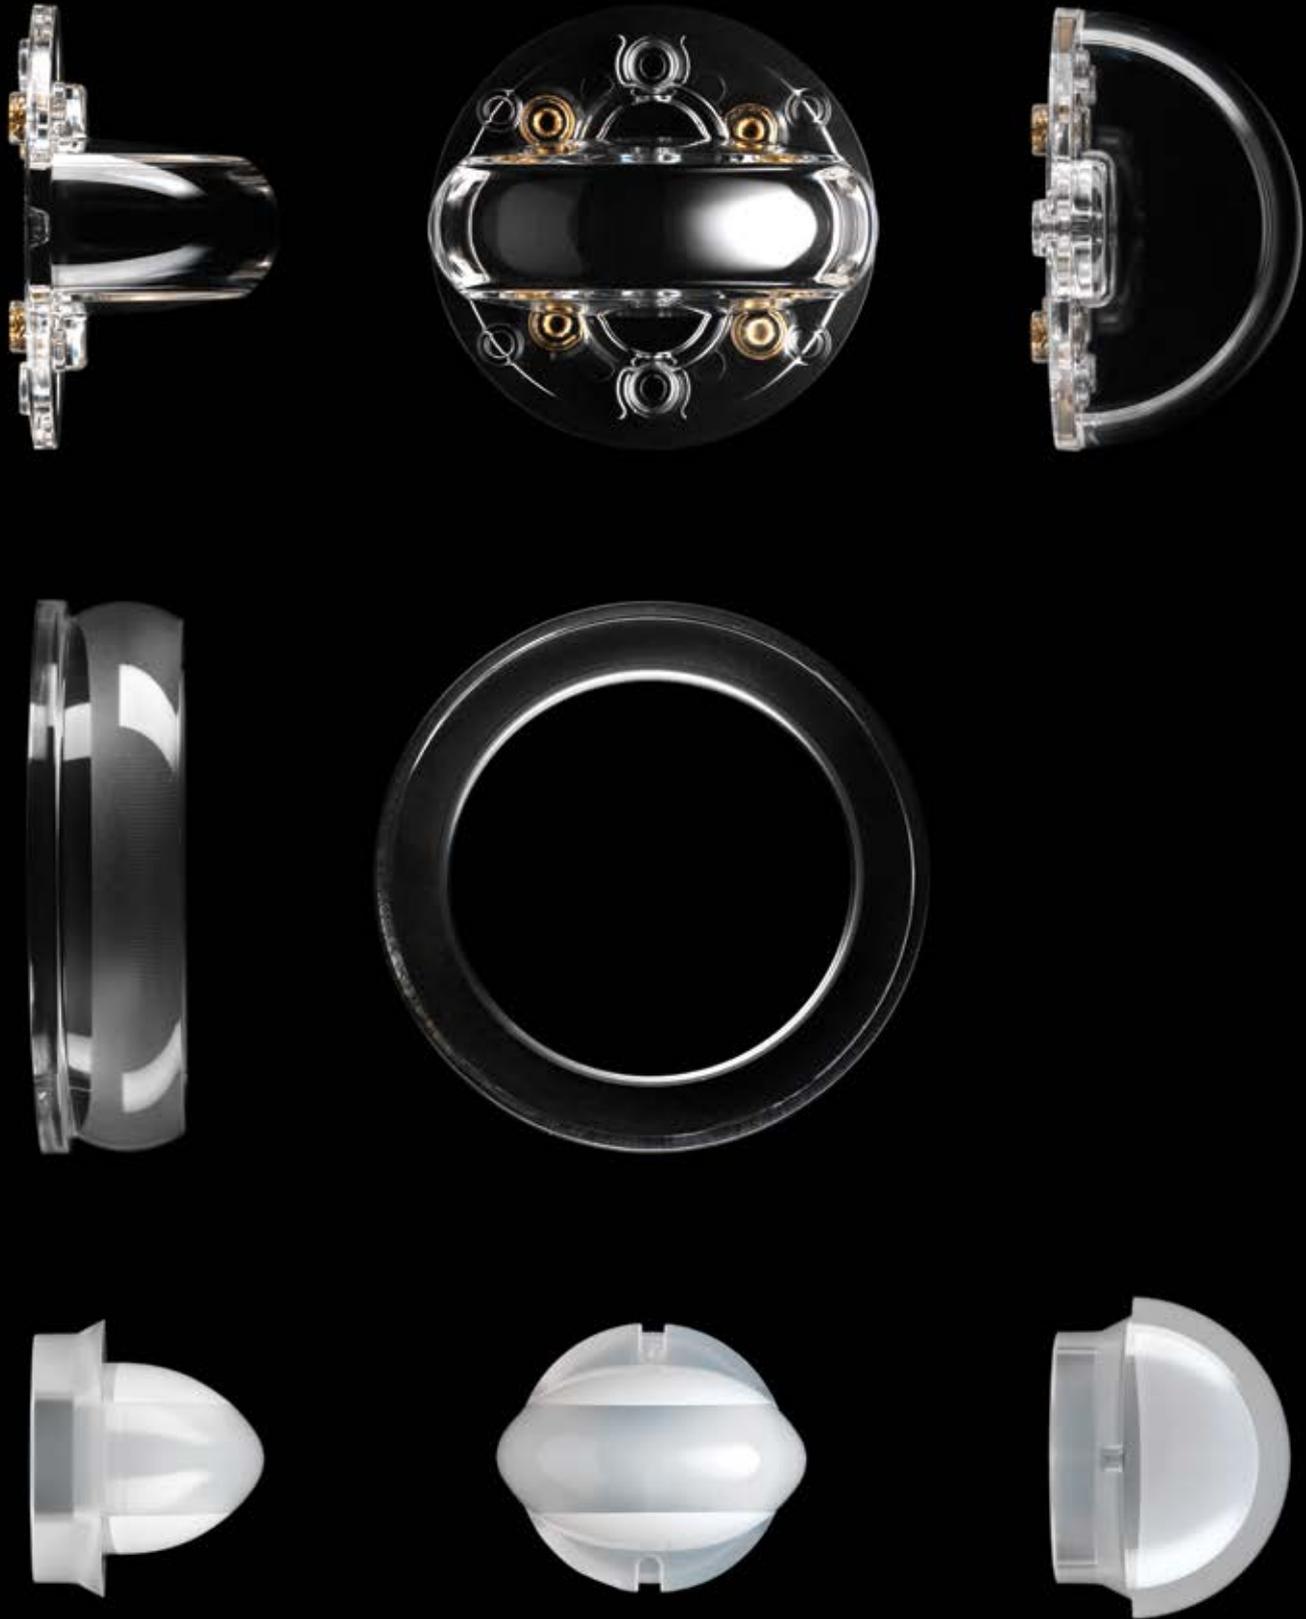

**Toroidal lens.** Moulded with a special high-transmission polymethyl methacrylate, the lens does not yellow or alter over time.

# Incredible to technology.

## A miniature optic.

The secret behind Trick's construction is the combination of a toroidal convex flat lens with a microprismed surface and an internally screened cover that aims the beam of light correctly and avoids any unwanted dispersion. Painstaking

research into materials has also led to the optimisation of special surface finishes. The lenses can therefore be transparent, satin or semi-satin finished depending on the model. This is therefore a tiny device that emits an incredible quantity of light.



**Energy saving.** Traditional light sources emit light at 360°, whereas LEDs focus light at an angle of less than 180°. This feature is further enhanced in Trick where inefficient light dispersion is reduced to a minimum and energy savings are maximised.

Trick




# Long lasting precision.

## Designed to amaze.

Clockware lighting created from a combination of technological and industrial processes. Trick is a complex and comprehensive product based on the precision and research of advanced craftsmanship. The special design of the body

guarantees optimal heat dissipation above and below the lens. The Leds are built in so they operate below critical temperatures. A correct thermal balance maintains the quality of the Leds even after thousands of hours.

Thermographic simulation  
(C°)

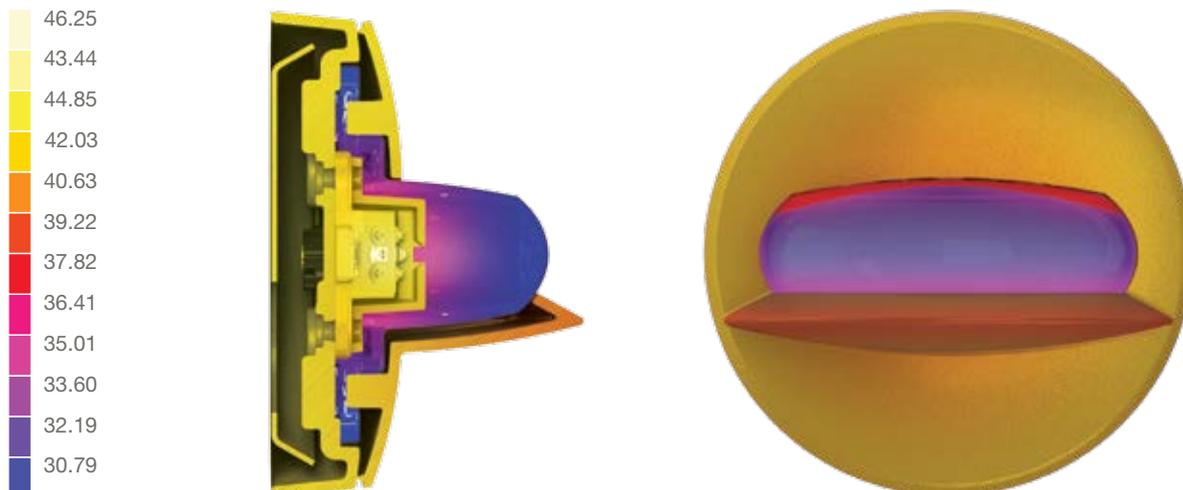

**Maintenance.** Correct heat dissipation, the size of the product and reduced maintenance requirements means that designers can now install Trick in hidden locations too.



**Trick**  
Visual comfort



Municipal hall, Crossen, Germany  
Architectural design: Weidemann Planergruppe  
Architekten, Stadtplaner

# Under control.

## Personal comfort.

All Trick models are designed to guarantee a high level of visual comfort. The product body and the lens position offer maximum visual efficiency, so light is distributed

evenly over buildings to enhance the viewer's experience. This is an ideal solution for installing luminaires in niches, openings, doorways or in residential areas.


### Washer Effect

Glare comfort

**80°**

Cut-off

**45°**

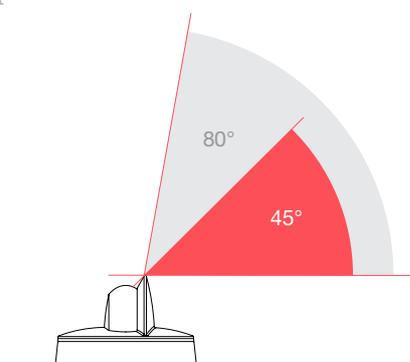


### Radial Effect

Glare comfort

**85°**

Cut-off

**50°**

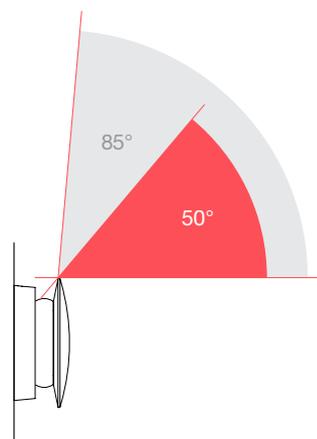


### Light Blade Effect / 360° Blade Effect

Glare comfort

**85°**

Cut-off

**45°**

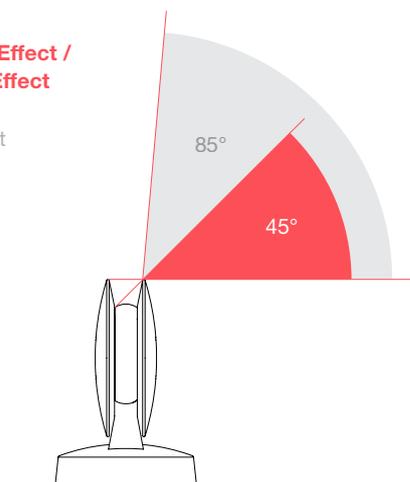


### 180° Blade Effect

Glare comfort

**80°**

Cut-off

**45°**

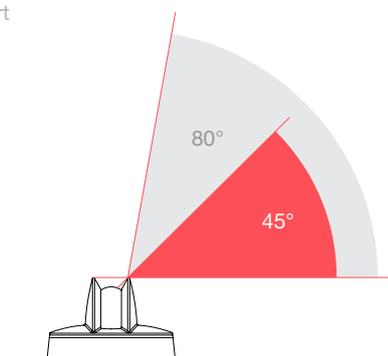

#### Cut-off

Within that angle there is no perception of the light (luminaire total dark look).

#### Glare comfort

Within that angle the reflector does not produce glare reflections, so it provides a high level of visual comfort.

**Trick**  
360° Blade Effect



Lighting design for Beaune, Beaune, France  
Lighting design: Jean François Touchard  
Photographs: Didier Boy de la Tour

# A tricky play.

## Lines of light.

A single body with two light effects. The Blade-Blade and 360° Blade Trick is an unusual, round, surface-mounted luminaire with a diameter of just 110 millimetres and a power rating of 5.8 W that emits concentrated, clearly defined beams

of light. Ideal for outlining wall, door and portico perimeters, niche contours and openings, or creating illuminated trails, these luminaires are perfect for modern architecture and ideal for historical settings.

**140**

millimetres



**90**

millimetres

**Trick**  
Light Blade Effect





Trick  
180° Blade Effect



Urbanistic complex Linked Hybrid, Beijing, China  
Architectural design: Steven Holl Architects  
Photographs: Hengzhong Lv

# Space is a dancer.

## Elegant patterns.

Trick is also a surface-mounted 180° Blade Effect that comes in 90 and 110 millimetre diameter versions, with or without a built-in ballast. Energy consumption is just 2.9 W. This means the device can be used to add rhythm to space

with vertical, horizontal and sloping lines. This adds psychological comfort to environments, guides the observer, improves the quality of the environment and highlights spaces, buildings and urban trails.




**57**  
millimetres



**90**  
millimetres

**Trick**  
180° Blade Effect

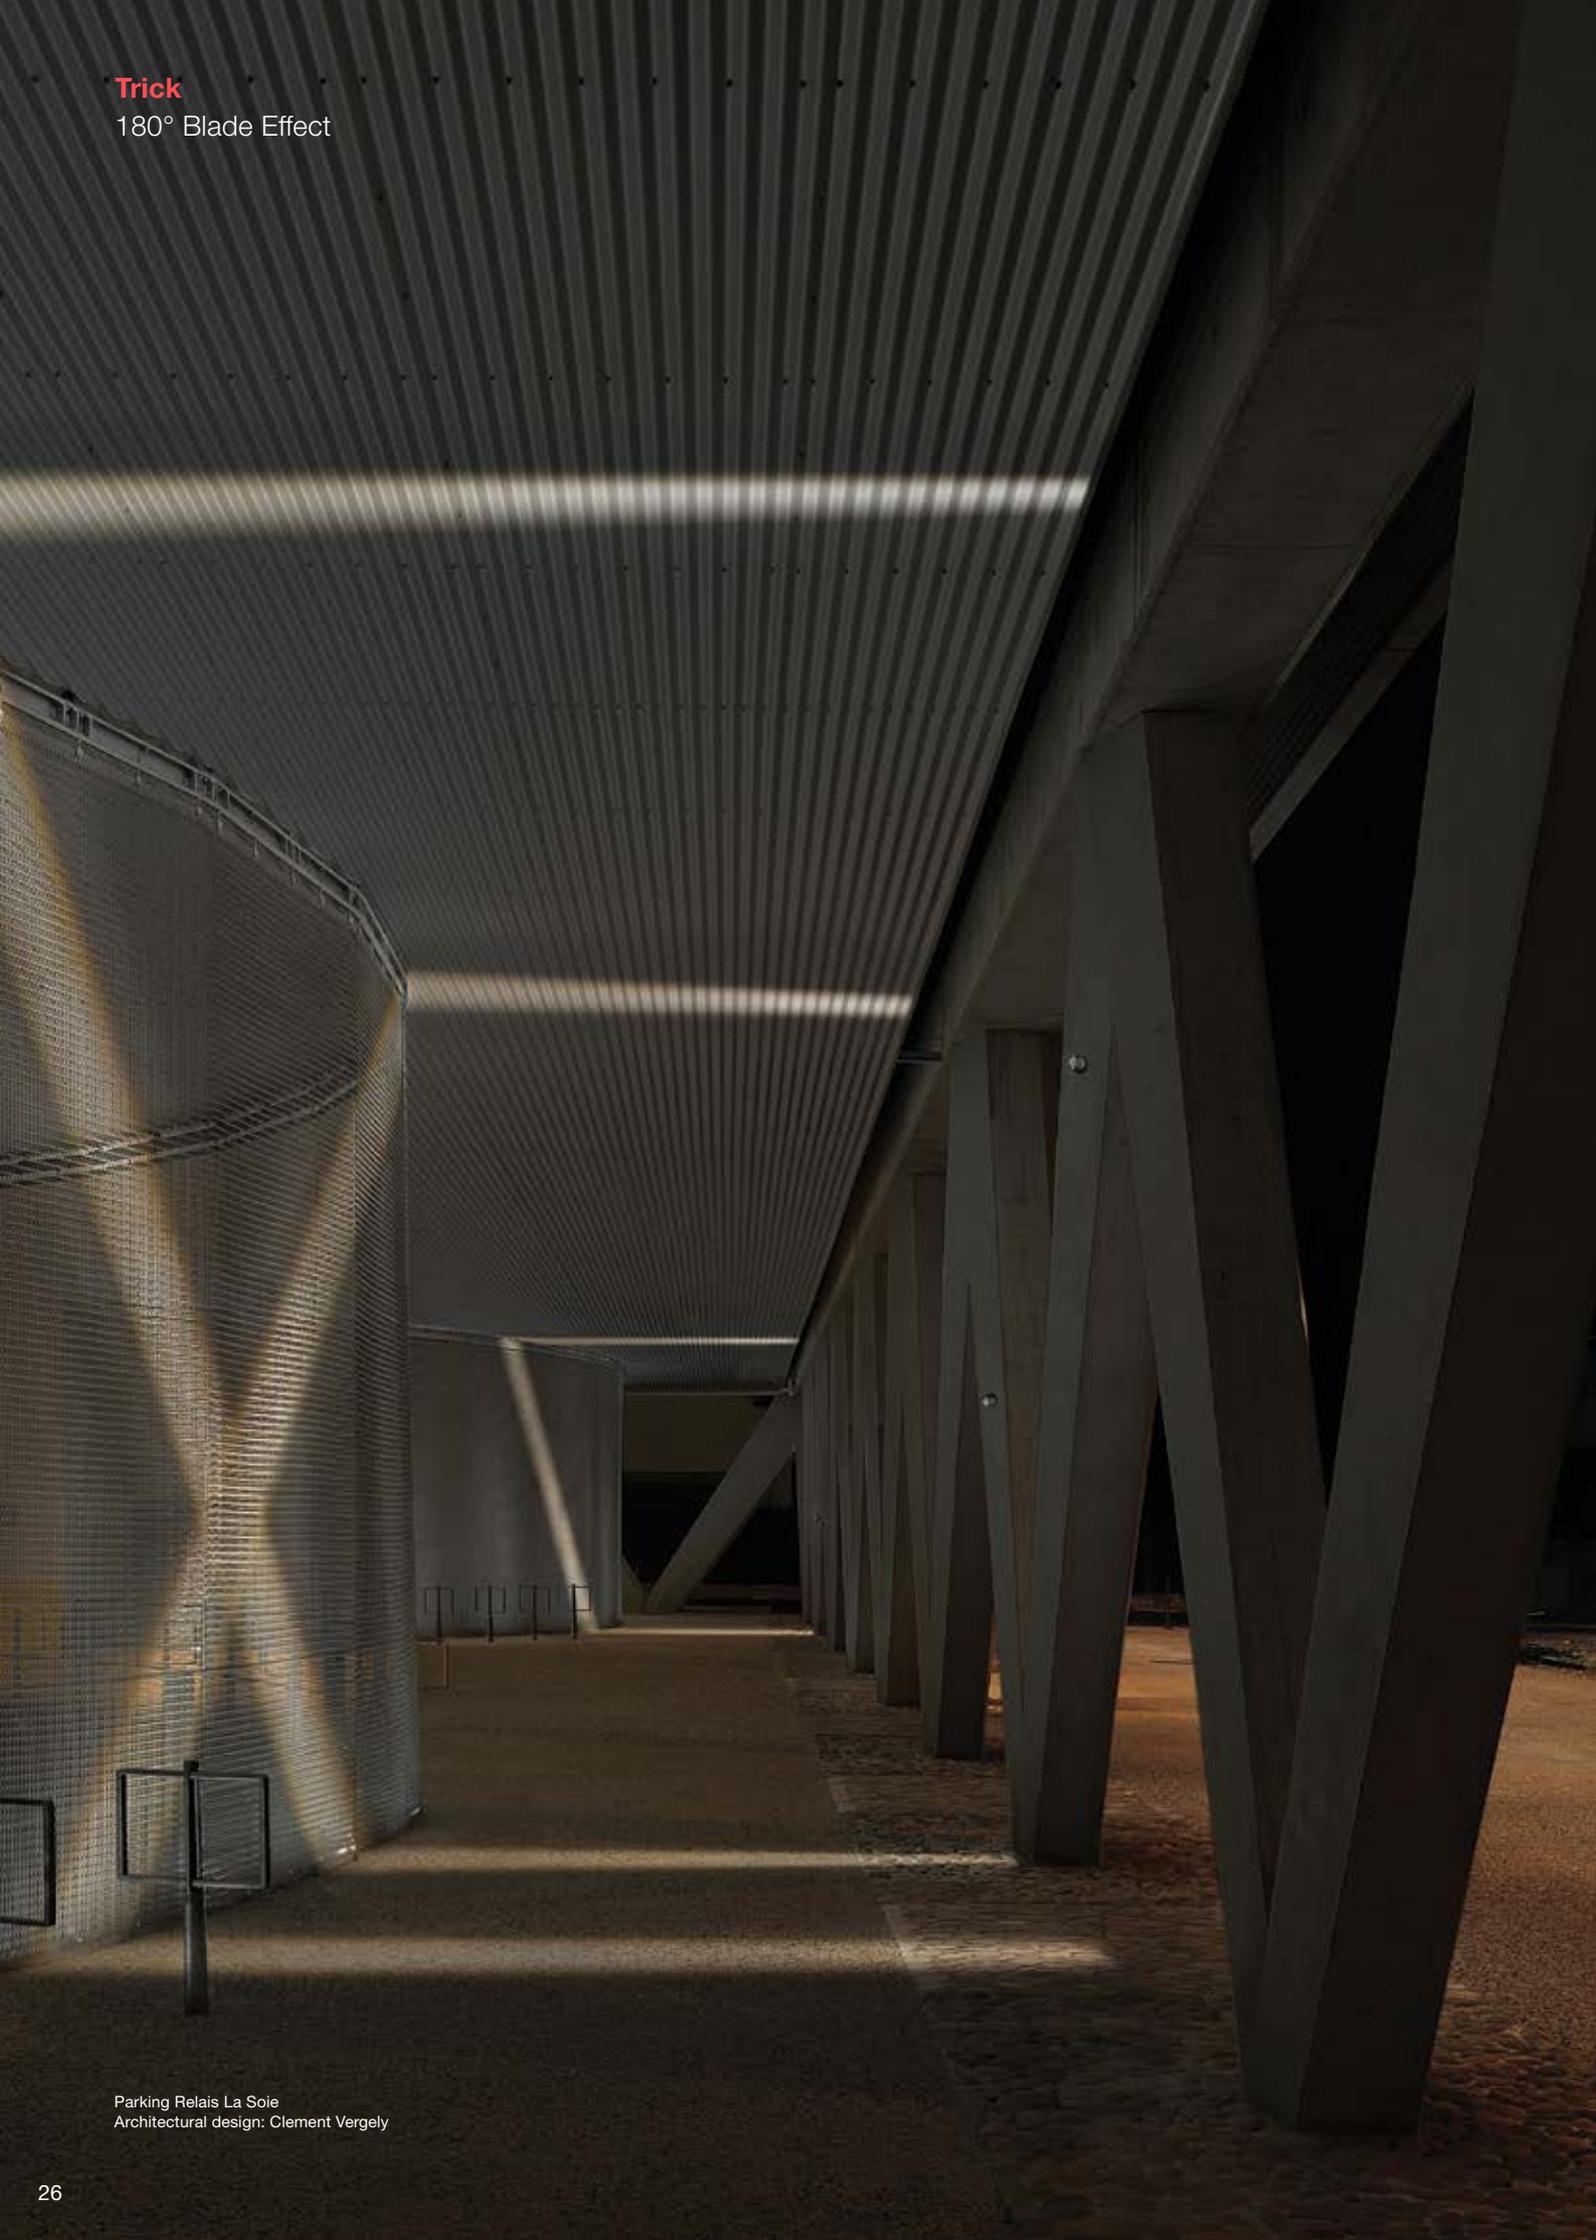

Parking Relais La Soie  
Architectural design: Clement Vergely



# Trick

## 360° Blade Effect / Light Blade Effect

Surface-mounted  
 Ø 90 mm




For installation instructions see pag. 42  
 For product codes see pag. 46

**6W** 620 lm 350 mA CRI 85  
 Warm White 3000 K


**6W** 620 lm 350 mA CRI 85  
 Warm White 3000 K

620 lm  
 CRI 85



6W →  50W \*

620 lm  
 CRI 85




6W →  50W \*

\* The flux and power values indicated are nominal.



\* The flux and power values indicated are nominal.

**Trick**  
 360° Blade Effect°


**Trick**  
 Light Blade Effect

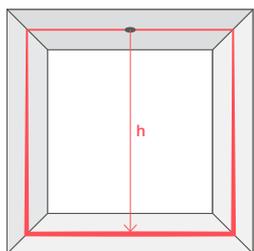


Distance (h)	Blade width	Illuminance
1 m	9 cm	450 lux
2 m	18 cm	120 lux
3 m	27 cm	55 lux
6 m	60 cm	15 lux

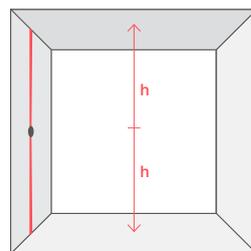

Distance (h)	Blade width	Illuminance
1 m	9 cm	360 lux
2 m	18 cm	90 lux
3 m	27 cm	40 lux




**Finish**



01  
 WHITE

15  
 GRAY



01  
 WHITE

15  
 GRAY



**180° Blade Effect**  
Surface-mounted  
Ø 110 mm


**180° Blade Effect**  
Surface-mounted  
Ø 90 mm



**3W** 320 lm 220-240 V CRI 85  
Warm White 3000 K

**3W** 320 lm 350 mA CRI 85  
Warm White 3000 K


320 lm  
CRI 85



3W →

20W \*

320 lm  
CRI 85



3W →


20W \*

\* The flux and power values indicated are nominal.



\* The flux and power values indicated are nominal.

**Trick**  
180° Blade Effect°


**Trick**  
180° Blade Effect°

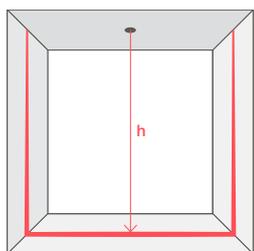

Distance (h)	Blade width	Illuminance
1 m	10 cm	450 lux
2 m	20 cm	120 lux
3 m	30 cm	55 lux
6 m	60 cm	15 lux

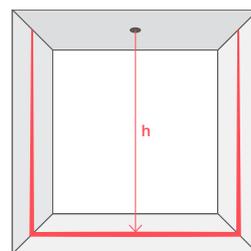

Distance (h)	Blade width	Illuminance
1 m	10 cm	450 lux
2 m	20 cm	120 lux
3 m	30 cm	55 lux
6 m	60 cm	15 lux



**Finish**



01  
WHITE

15  
GRAY



01  
WHITE

15  
GRAY

**Trick**  
Radial Effect



The MUSE, Science Museum, Trento, Italy  
Architectural design: RPBW  
Lighting design: Piero Castiglioni  
Photographs: Enrico Cano

# Concrete symmetry.

## Uniform materials.

Trick Radial Effect emits a soft, even background light that caresses the surface on which it is installed. The blade of light which could once only be installed horizontally to walls is now available with a 360° effect and an even distribution of energy. The luminaires can measure either 45, 110 or 160

millimetres, with a power supply ranging between 4.2 and 11.6 W. This saves energy even for large surfaces. And when a skimmed light effect is used, the features of the surface are beautifully accented with natural contrasts. Trick, then, is undoubtedly a new concept in lighting.



**42**  
millimetres




**110**  
millimetres

**Trick**  
Radial Effect



A-2 Residential Building,  
Multi-storey residential building, Rende, Italy  
Architectural design: Gianfranco Malara,  
Francesco Carlo Valentini  
Photographs: Giuseppe Saluzzi

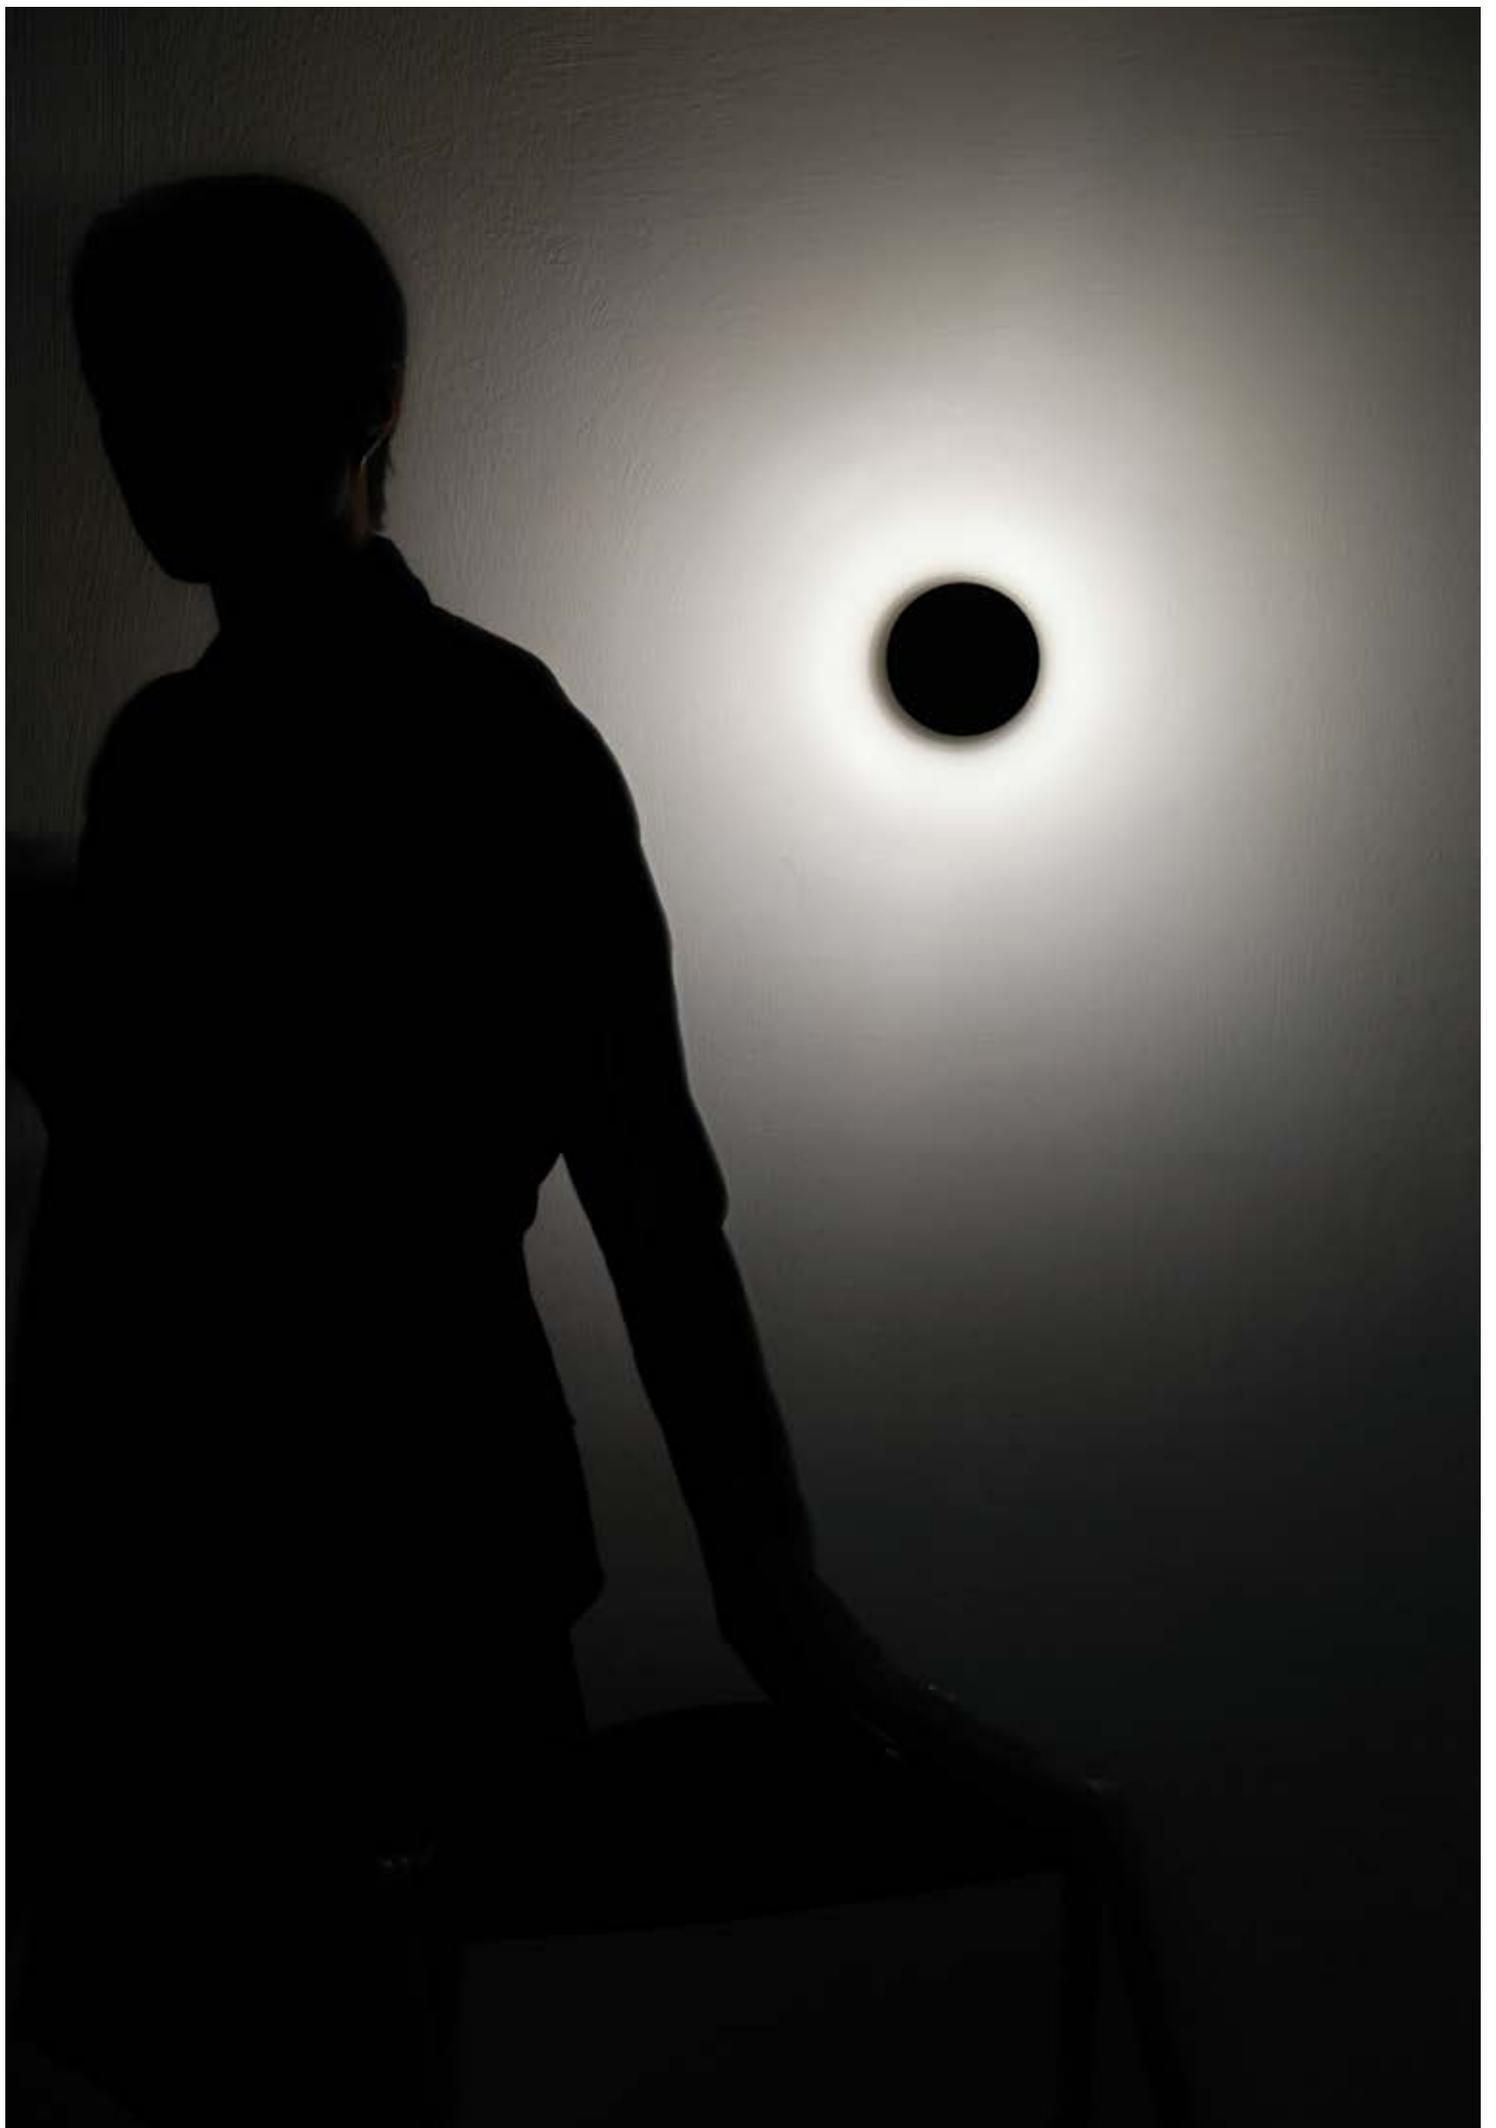

# Trick

## Radial Effect

Surface-mounted  
Ø 160 mm


## Radial Effect

Surface-mounted  
Ø 110 mm



**12W** 1270 lm 220-240 V CRI 85  
Warm White 3000 K

**6W** 620 lm 220-240 V CRI 85  
Warm White 3000 K





\* The flux and power values indicated are nominal.

\* The flux and power values indicated are nominal.

**Trick**  
Radial Effect Ø 160

**Trick**  
Radial Effect Ø 110 ( high )

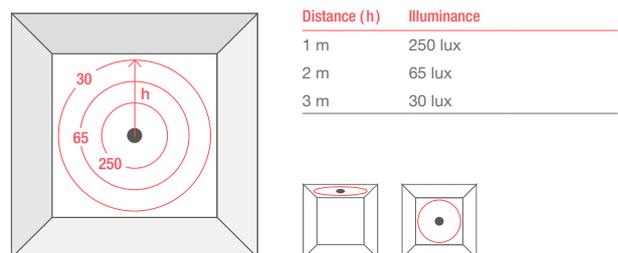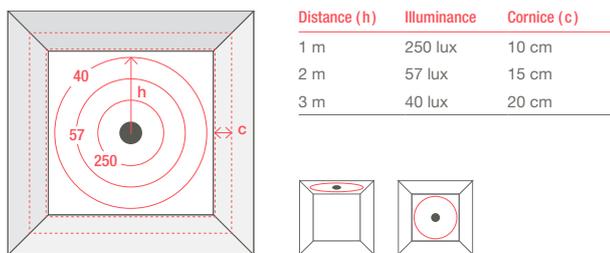

## Finish






### Radial Effect

Surface-mounted  
Ø 110 mm

### Radial Effect

Recessed  
Ø 45 mm

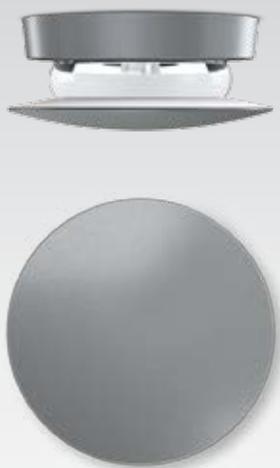

For installation instructions see pag. 43 – 44  
For product codes see pag. 46

**6W** 630 lm 350 mA CRI 85  
Warm White 3000 K

**4W** 460 lm 250 mA CRI 85  
Warm White 3000 K

630 lm CRI 85 6W → 50W \*



460 lm CRI 85 4W → 35W \*

\* The flux and power values indicated are nominal.

\* The flux and power values indicated are nominal.

**Trick**  
Radial Effect Ø 110 ( low )

**Trick**  
Radial Effect Ø 45

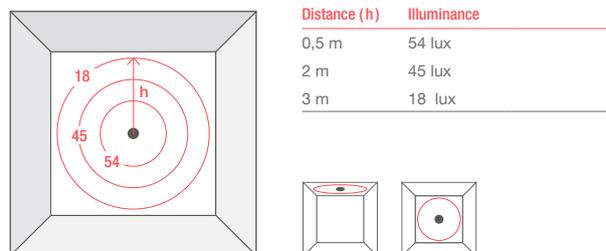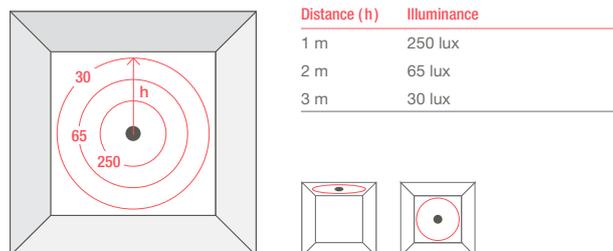

### Finish



Trick  
Washer Effect



Academy of Science, Baku, Azerbaijan  
Architectural design: Mikayil Useynov  
Photographs: Giuseppe Saluzzi

# A luminous layer.

A small, but powerful washer.

Trick Washer Effect is a small, yet extremely powerful luminaire that can satisfy all and any lighting requirement without its physical presence impacting on the facade. The device is available in two sizes, 90 and 110 millimetres, and two power ratings, 2.1W and 2.9W with a driver that

is either remote or built into the base. Ideal for highlighting the details of historic buildings with complex mouldings. Trick is the result of our constant commitment to combining technology and design to meet the needs of any project or building.



**57**  
millimetres



**90**  
millimetres

Trick  
Washer Effect



Lighting of the historic city of Talerzhuang  
Zaozhuang, China



## Trick

### Washer Effect


Surface-mounted  
Ø 110 mm



**3W** 320 lm 220-240 V CRI 85

Warm White 3000 K

320 lm  
CRI 85




3W →

20W \*

\* The flow and power values indicated are nominal.

## Trick

Washer Effect Ø 110

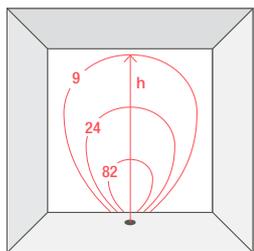


Distance (h)    Illuminance

1 m            82 lux

2 m            24 lux

3 m            9 lux

Values refer to a product installed  
20 cm from the wall.



## Finish



01  
WHITE



15  
GRAY



**Washer Effect**  
Surface-mounted  
Ø 90 mm


**Washer Effect**  
Recessed  
Ø 45 mm



For installation instructions see pag. 45  
For product codes see pag. 47

**3W** 320 lm 350 mA CRI 85  
Warm White 3000 K

**2W** 240 lm 250 mA CRI 85  
Warm White 3000 K

320 lm CRI 85  57 **3W** →  **20W** \*





240 lm CRI 85  28 **2W** →  **15W** \*

\* The flow and power values indicated are nominal.

\* The flow and power values indicated are nominal.


**Trick**  
Washer Effect Ø 90

**Trick**  
Washer Effect Ø 45

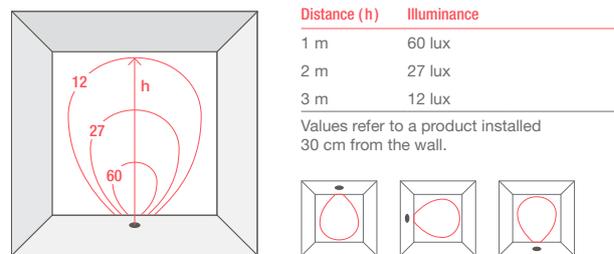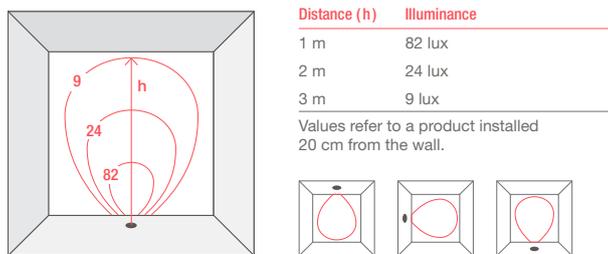


## Trick

### Surface mounted 360° Blade Effect / Light Blade Effect

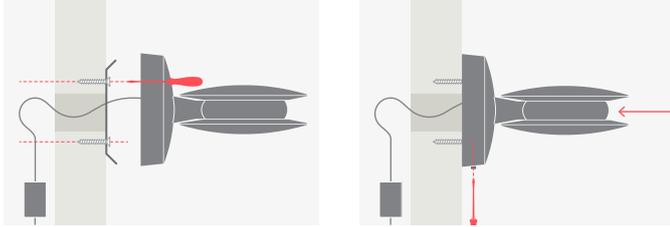


- (1) Feed the cable through with the driver
- (2) Apply the plate
- (3) Connect the product
- (4) Secure the product to the plate with a side grub screw.

### Surface mounted 180° Blade Effect

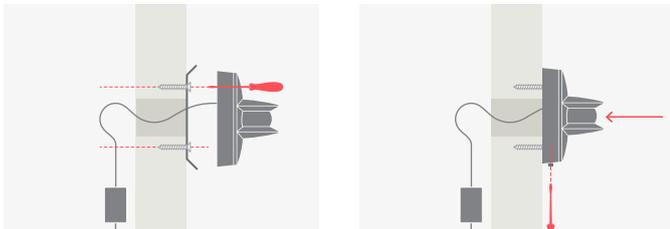

- (1) Feed the cable through with the driver
- (2) Apply the plate
- (3) Connect the product
- (4) Secure the product to the plate with a side grub screw.

### Surface mounted 180° Blade Effect

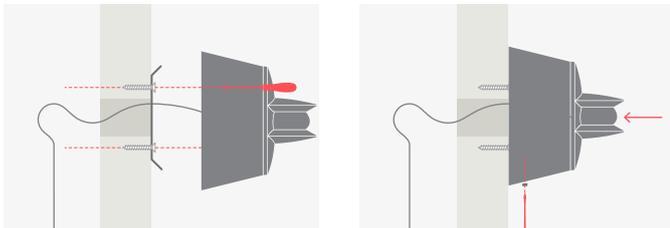

- (1) Feed the cable through
- (2) Apply the plate
- (3) Connect the product
- (4) Secure the product to the plate with a side grub screw.

#### Driver for 360° Blade Effect / Light Blade Effect


Driver	No. products	Max Dist.
X020 7 – 19 W ( @350 mA )	2	500 m
9905 7 W ( 350 mA )	1	500 m
9907 17 W ( 350 mA )	2	500 m
X090 10 – 20 W DALI ( @350 mA )	2	500 m

#### Driver for 180° Blade Effect

Driver	No. products	Max Dist.
X020 7 – 19 W ( @350 mA )	5	500 m
9905 7 W ( 350 mA )	2	500 m
9907 17 W ( 350 mA )	4	500 m
X090 10 – 20 W DALI ( @350 mA )	4	500 m


## Installation

Surface mounted  
Radial Effect Ø 90

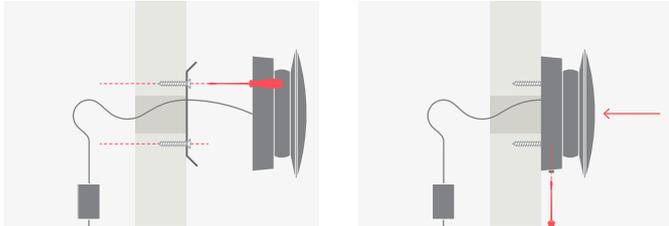

- (1) Feed the cable through with the driver
- (2) Apply the plate
- (3) Connect the product
- (4) Secure the product to the plate with a side grub screw.

Surface mounted  
Radial Effect Ø 110 / 160

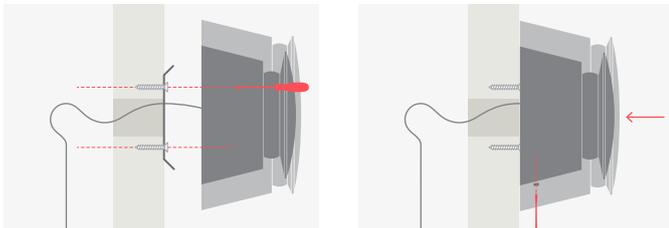


- (1) Feed the cable through
- (2) Apply the plate
- (3) Connect the product
- (4) Secure the product to the plate with a side grub screw.

Driver for Radial Effect Ø 90 / Ø 110 / 160

Driver	No. products	Max Dist.
X020 7 – 19 W ( @350 mA )	2	500 m
9905 7 W ( 350 mA )	1	500 m
9907 17 W ( 350 mA )	2	500 m
X090 10 – 20 W DALI ( @350 mA )	2	500 m


## Trick

### Push-in recessed installation Radial Effect Ø 45

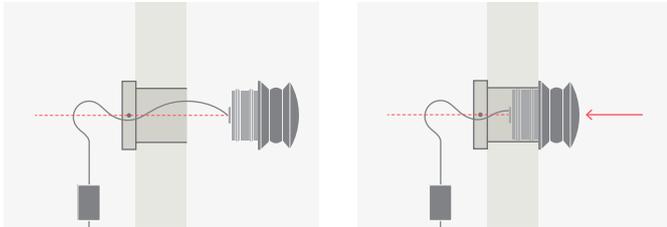


- (1) Position the outer casing
- (2) Feed the cable through with the driver
- (3) Connect the product
- (4) Press the product into place.

### Push-in recessed installation in concrete Radial Effect Ø 45

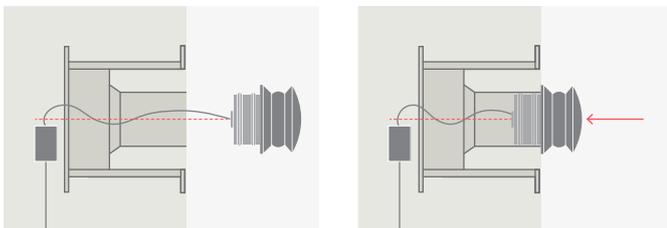

- (1) Position the outer casing
- (2) Feed the cable through with the driver
- (3) Connect the product
- (4) Press the product into place.

### False ceiling recessed installation with steel wire springs Radial Effect Ø 45

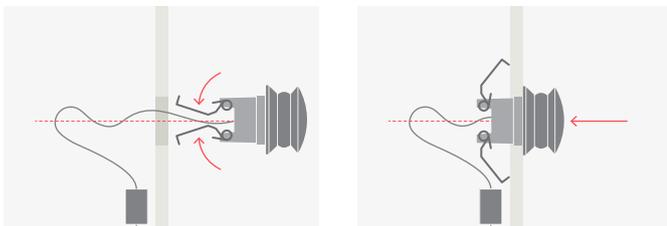


- (1) Drill a hole in the panel
- (2) Connect the product
- (3) Insert the product.

### Driver for Radial Effect Ø 45

Driver	No. products	Max Dist.
X019 6 W ( 250 mA )	5	500 m
X020 7 – 19 W ( 250 mA )	5	500 m
X090 10 – 20 W DALI ( 250 mA )	4	500 m


## Installation

### Surface mounted Washer Effect Ø 90

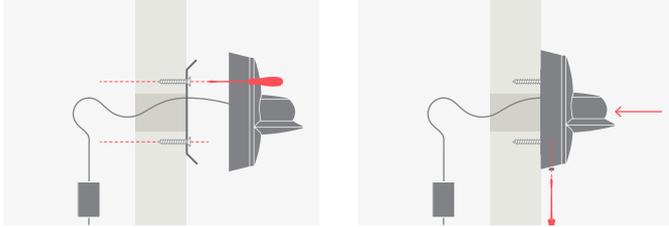


- (1) Feed the cable through with the driver
- (2) Apply the plate
- (3) Connect the product
- (4) Secure the product to the plate with a side grub screw.

### Surface mounted Washer Effect Ø 110

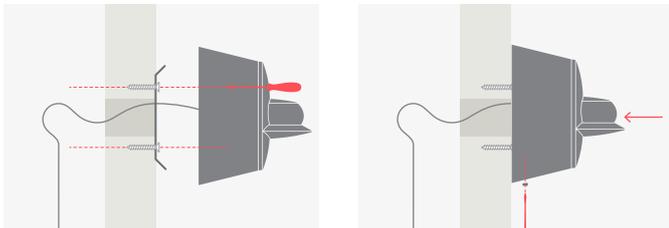


- (1) Feed the cable through
- (2) Apply the plate
- (3) Connect the product
- (4) Secure the product to the plate with a side grub screw.

### Push-in recessed installation Washer Effect Ø 45

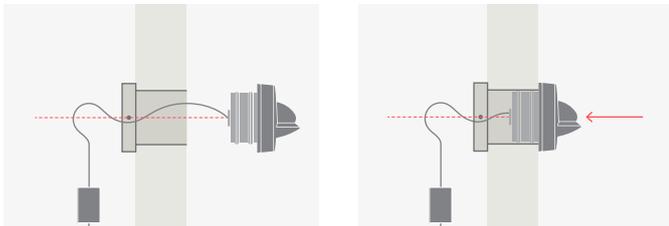

- (1) Position the outer casing
- (2) Feed the cable through with the driver
- (3) Connect the product
- (4) Press the product into place.

### Push-in recessed installation in concrete Washer Effect Ø 45

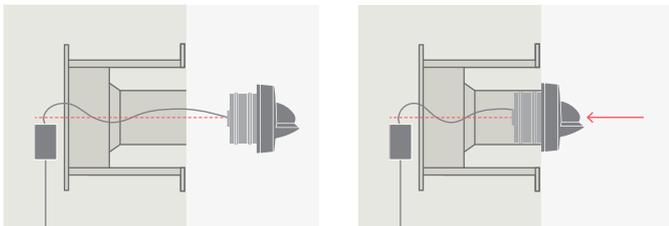

- (1) Position the outer casing
- (2) Feed the cable through with the driver
- (3) Connect the product
- (4) Press the product into place.

#### Driver for Washer Effect Ø 90 / Ø 110

Driver	No. products	Max Dist.
X020 7 – 19 W ( @350 mA )	5	500 m
9905 7 W ( 350 mA )	2	500 m
9907 17 W ( 350 mA )	4	500 m
X090 10 – 20 W DALI ( @350 mA )	4	500 m


#### Driver for Washer Effect Ø 45

Driver	No. products	Max Dist.
X019 6 W ( 250 mA )	2	500 m
X020 7 – 19 W ( @250 mA )	5	500 m
X090 10 – 20 W DALI ( @250 mA )	4	500 m

## Trick

360° Blade Effect / Light Blade Effect


180° Blade Effect / Radial Effect

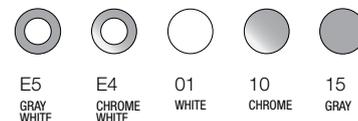

### 360° Blade Effect




Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Surface-mounted</b>				
	Warm white				
6W	620	3000	<b>BU27</b>	01-15	
Power supply 350 mA to be ordered separately.					



### Light Blade Effect



Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Surface-mounted</b>				
	Warm white				
6W	620	3000	<b>BU28</b>	01-15	
Power supply 350 mA to be ordered separately.					



### 180° Blade Effect



Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Surface-mounted</b>				
	Warm white				
3W	320	3000	<b>BU16</b>	01-15	
Power supply 350 mA to be ordered separately.					




Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Surface-mounted</b>				
	Warm white				
3W	320	3000	<b>BU22</b>	01-15	
Complete with power supply. Class of Insulation II.					




### Radial Effect



Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Recessed with springs</b>				
	Warm white				
4W	460	3000	<b>BU07</b>	01-10-15	
Power supply 250 mA to be ordered separately.					



Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Push-in recessed installation</b>				
	Warm white				
4W	460	3000	<b>BU08</b>	01-10-15	
Power supply 250 mA to be ordered separately.					




Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Surface-mounted</b>				
	Warm white				
6W	630	3000	<b>BU10</b>	01-10-15	
Power supply 350 mA to be ordered separately.					



Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Surface-mounted</b>				
	Warm white				
6W	620	3000	<b>BU17</b>	01-E5-E4	
Complete with power supply. Class of Insulation II.					




Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Surface-mounted</b>				
	Warm white				
12W	1270	3000	<b>BU23</b>	01-E5-E4	
Complete with power supply. Class of Insulation II.					



The luminaires without power supply are compatible with the Master Pro DMX and Master Pro Evo lighting management systems.

# Trick

## Washer Effect




### Washer Effect



Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Push-in recessed installation</b>				
	Warm white				
	2W	240	3000	<b>BU09</b>	01-15

Power supply 250 mA to be ordered separately.



Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Surface-mounted</b>				
	Warm white				
	3W	320	3000	<b>BU21</b>	01-15

Complete with power supply.  
Class of Insulation II.



Source	W	lm	K	Code	Colour
<b>LED</b>	<b>Surface-mounted</b>				
	Warm white				
	3W	320	3000	<b>BU14</b>	01-15

Power supply 350 mA to be ordered separately.



The luminaires without power supply are compatible with the Master Pro DMX and Master Pro Evo lighting management systems.

### Accessories, installation systems and components

	Code	Colour		Code	Colour		Code	Colour
Trick bits	<b>X021</b>	13	Constant Current LED driver 6W - IP20 $V_{IN}=100\div 240V_{ac} / 50\div 60Hz$ $V_{OUT}=24V_{dc}$ 250 mA dim. 42x40x22h	<b>X019</b>	00	Dimmable electronic ballast DALI 50W - IP20 $V_{IN}=100\div 240V_{ac} / 50\div 60Hz$ $V_{OUT}=24V_{dc}$ 350 mA dim. 42x40x22h	<b>X090</b>	00
		h 25 mm		for BU07- BU08- BU09			for BU07- BU08- BU10	
Trick bits	<b>X022</b>	13						
		h 25 mm						
Casing for concrete walls	<b>BZZ8</b>	00	Constant Current LED driver 7-19W - IP20 $V_{IN}=100\div 240V_{ac} / 50\div 60Hz$ $V_{OUT}=24V_{dc}$ 250 mA dim. 42x40x22h	<b>X020</b>	00	Constant Current LED driver 17W - IP20 $V_{IN}=110\div 240V_{ac} / 50\div 60Hz$ $V_{OUT}=48V_{dc}$ 350 mA dim. 38x122x28h	<b>9907</b>	00
		for BU07- BU08- BU09		for BU07- BU08- BU09			for BU10- BU27- BU28- BU16- BU14	
Cylindrical casing for plasterboard or similar walls	<b>X000</b>	00	Constant Current LED driver 7W - IP20 $V_{IN}=100\div 240V_{ac} / 50\div 60Hz$ $V_{OUT}=24V_{dc}$ 350 mA dim. 42x40x22h	<b>9905</b>	00	Box for power supply IP67 dim. 140x230x95h	<b>9582</b>	00-01
		for BU08- BU09		for BU10- BU27- BU28- BU16- BU14				
			Dimmable electronic ballast DALI 50W - IP20 $V_{IN}=100\div 240V_{ac} / 50\div 60Hz$ $V_{OUT}=24V_{dc}$ 350 mA dim. 42x40x22h	<b>BZM4</b>	00	Box for power supply IP67 dim. 280x190x130h	<b>BZ33</b>	00-01
				for BU14				

For further information consult the technical sheets at [products.iguzzini.com](http://products.iguzzini.com)

## Conditions of sale

### General Conditions

iGuzzini reserves the right to discontinue any products from its collection at any time and without prior notice, without prejudice to the essential characteristics of the models described, to make technical and photometric changes and to change parts, details or finishes as it sees fit for the purpose of improvement or to meet construction and commercial needs. Goods are shipped at the customer's risk, even if sold "free domicile". Any exportation of goods purchased must be authorised in advance in writing by iGuzzini. The pole + products combinations presented in the catalogue are approximate, in particular with reference to the wind load stability test, which must be carried out and adapted, on each occasion, depending

on the features of the place. The provisions in force must also be taken into account. For installation methods, refer only to the conditions described in the instruction leaflet contained in the product packaging and/or available on the website [www.iguzzini.com](http://www.iguzzini.com). The information provided is approximate and is not binding. iGuzzini reserves the right to delete, amend and/or correct the information herein, according to the development of regulations and/or technical and/or technological developments. In any case, iGuzzini will do everything possible to ensure that all information herein is correct and up-to-date at the time the catalogue goes to press, although it shall not be liable in any cases where, despite the checks

carried out, there are errors and/or mistakes due to changes in regulations and/or technology, due to the use of software other than that used by iGuzzini and/or due to causes which are outside of iGuzzini's control.

For information and updates about the compatibility of lamps available for the luminaires present in this text, consult the instruction leaflets accessible in the download area of the electronic catalogue [www.iguzzini.com](http://www.iguzzini.com)

These conditions are valid from 01.01.2014

### Safety seals

To guarantee operation and safety, public bodies have set specific standards, which protect the end user against risks. In line with its quality and safety policy, iGuzzini makes its products in compliance with said standards. Non-electric components of the systems (covers, couplings, etc.) cannot be considered luminaires, therefore they are not covered by the standards used as the basis for

certification by quality seal Institutes. However, for all components of the systems certified, compatibility and safe use have been tested by the Institutes. Luminaires in the iGuzzini collection are designed in conformity with European Standards EN 60598-1 and special requirements, therefore they meet said requirements, including maximum temperatures allowed, considering 25°C as the ambient

temperature. For countries or application environments with thermal or microclimatic references other than those envisaged (e.g.: swimming pools, environments with the risk of explosion, etc.) please contact the company. For correct installation of the luminaires always consult the instruction leaflet supplied with the product.

### Warranty

iGuzzini guarantees that its products are free from manufacturing and/or material defects, for normal intended use, for a period of five years from the date of the invoice, subject to online registration at the website [www.iguzzini.com](http://www.iguzzini.com) and acceptance of specific conditions. In any case, iGuzzini recognises the legal warranty.

### Information

For enquiries, to report issues and request assistance, contact the reference company for your geographical area, indicated at [www.iguzzini.com](http://www.iguzzini.com).

### Notes

For the ENEC mark for individual product codes, see the download area for the online catalogue [products.iguzzini.it](http://products.iguzzini.it)

### Photographic Elaborations

pag. 18 – 20 – 22 – 24 – 26 – 30 – 32 – 36  
38 – 40

### Credits

#### Graphics and layout

xycomm – Milano

#### Printed by

Tecnostampa – Recanati

#### Photos

esastudiobuschi.it

For the sales network consult the website:  
[www.iguzzini.com](http://www.iguzzini.com)





